DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

CHECK LIST-RECORDS RECEIVED AND WELL STATUS

Operator: **Aera Energy LLC** WELL DESIGNATION **"Edison" 61**

API No. **11104384** SE **21** T: **3N** R.: **23W** , **SB** B. and M.

County: **Ventura** FIELD: **Ventura**

Type of Notice: **Rework** **Date** **10/21/2013** **Report Number:** **P213-0393**

RECORDS RECEIVED (ATTACH PAGES IF REQUIRED)

	Date	OK	NEED	Remarks
Well Summary (OG100)				
History (OG103)	2-13-14	✓		
E-Log				
Mud Log				
Dipmeter				
Directional				
Core and/or SWS				

NEW STATUS

DATE: _____

NOTICE OF RECORDS DUE

DATE: _____

DATE: _____

DATE: _____

DATE: _____

WELL STATUS INQUIRY

DATE: _____

DATE: _____

Well Stat

Change Required: No

Change Done: _____

ABANDONMENTS/REABANDONMENTS/DRILLS/REDRILLS

CalWims Abandonment Form: _____ SURFACE INSPECTION NEEDED _____ COMPLETED _____
Date and Inspector

FINAL LETTER NEEDED _____ COMPLETED _____ Calwims DRILL/REDRILL Form _____
(Date)

ENGINEER'S CHECK LIST

T-REPORT(S) _____ OPERATOR'S NAME _____ WELL DESIGNATION _____ SIGNATURE _____

Calwims Location _____ Calwims ELEVATION: _____ CONFIDENTIAL RELEASE DATE: _____ PERMIT REQUIREMENTS MET _____

CLERICAL CHECK LIST

LOCATION CHANGE (OG165) _____ ELEVATION CHANGE (OG165) _____ RELEASE OF BOND (OG150) _____

REMARKS

RECORDS SCANNED: _____
(Date)

RECORDS APPROVED: 3-19-2014 BH
(Date and Engineer)

Modified OGD2

AOR Datbase _____

SUBMIT IN DUPLICATE

Rec'd 02-13-14 DOGGR D2 Ventura

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

HISTORY OF OIL OR GAS WELL

Operator: Aera Energy LLC
Well Name: EDISON 50
Aera Well Name: EDI50

Field: Ventura

Sec: 21 T: 3N R: 23W SB: B.&M.

County: Ventura

API Number: 11104373

Name Megan Graves
(Person submitting report)

Title : AGENT
(President,Secretary, or Agent)

Date: 02/13/2014

Signature: Misty Logues

10000 Ming Ave.,Bakersfield, CA 93311
(Address)

(Telephone Number)

History must be complete in all details. Use this form to report all operations during drilling and testing of the well or during redrilling or altering the casing, plugging, or abandonment with the dates thereof. Include such items as hole size, formation test details, amounts of cement used, top and bottom of plugs, perforation details, sidetracked junk, bailing test and initial production data.

KB to GL: 11.90 ft

Start Operations			
RIG COMPANY:	**Rig #:**	**START OPERATIONS:**	
		Date :	**Time :**
NABORS WELL Doubles Rig	1437	11/13/2013	06:00

11/13/2013

Depth:	Description:
	Traveled to location.
	Held safety meeting. Filled out all required safety paperwork.
	Unloaded the workfloor trailer and reloaded it in order to be safe for transporting. Loaded up the hardlines and hoses. Hauled rig down to the front gate of the taylor side. Hauled doghouse, workfloor trailer, b.o.p.e., to Edison50.
	Lunch.
	Had pump, tanks, OST bin and rig mat hauled in and spotted.
	Secured the location.
	Traveled back to the Nabors yard.

11/14/2013

Depth:	Description:
	Traveled to the lease.
	Held tailgate meeting. Pretripped route then inspected the rig and vehicles.
	Had rig towed from Taylor side over to Edison 50.
	Held safety meeting. Filled out all required safety paperwork. Inspected the location and performed L.O.T.O.
	Spotted in rig. Raised rig on its jacks. Raised the mast while Braun shut the power off the overhead powerlines to allow the rig clearance. Set out all guylines then the escape rope.
	Lunch.
	Bled down the well. Tubing had 400 p.s.i. and casing had 900 p.s.i. Broke out and removed the production tree. Broke out the wellhead bolts and removed the top flange. Made up the anchor unsetting mandril and unlanded the tubing. Found anchor unset. Landed tubing back down. Nippled up the b.o.p.e.
	Secured the well and location.
	Traveled back to the Nabors yard.

Operator: Aera Energy LLC
Well Name: EDISON 50
Aera Well Name: EDI50

Field: Ventura

Sec: 21 T: 3N R: 23W SB: B.&M.

County: Ventura
Rec'd 02-13-14 DOGGR D2 Ventura

API Number: 11104373

Name: Megan Graves
(Person submitting report)

Title : AGENT
(President,Secretary, or Agent)

Date: 02/13/2014

11/15/2013

Depth:	Description:
	Traveled to location.
	Held safety meeting. Filled out all required safety paper work.
	Bled down the well. Function tested the b.o.p.e. Rigged up the Weatherford hydro-tester and pressure tested the b.o.p.e. at a high 1000 p.s.i. and low 250 p.s.i.
	Rigged up the workfloor. Unloaded the tubing equipment and rigged it up. Had Chris from the D.O.G. stop by and check out our b.o.p.e. Began to rig up the mud pump.
	Lunch.
	Continued and finished rigging up the mud pump, hardlines and hoses. Changed the well completely over with 500 barrels of 4% KCL water.
	Broke out and removed the tubing hanger donut. Began pulling the tubing out of the hole. Pulled out 40 stands at E.O.T.
	Made up the tubing hanger donut and landing the tubing. Closed the pipe rams and casing valves. Installed and closed the T.I.W. valve. Secured the well and location.
	Traveled to back to the Nabors yard.

11/18/2013

Depth:	Description:
	Traveled to location.
	Held safety meeting. Filled out all required sfatey paper work.
	Bled down the well. Opened and function tested the b.o.p.e.
	Continued with pulling the tubing out of the hole.
	Lunch.
	Continued with pulling the tubing out of the hole. Switched equipment over from 2-7/8" to 2-3/8". Pulled the 2-3/8" production string out of the hole. Pulled out a total of 158 stands, 142 2-7/8" and 31 2-3/8".
	MU 4-1/2" 16.6# positive scraper with a 3-5/8" bit & four 3-1/8" DCs & RIH. PU 33 joints 2-3/8" workstring. Began running tubing out of derrick.
	Secured the well and location.
	Traveled back to the Nabors yard.

11/19/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	Cont. RIH w/ 4-1/2" 16.6# scraper w/ 3-5/8" bit & four 3 1/8" DCs. Tag fill at 11466', lay down 10 jts. Pull up 47 dbls for night. Land on donut. Spot in power swivel.
	Secure well.
	Drive to yard.

11/20/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	RIH w/ tbg, 44 Dbls, scraper, 3-5/8" bit & four 3-1/8" DCs. Tagged higher than yesterday, at 11281'. Work past, continue on down, hanging up every 30'. Work past hang up, slide down 30' easy, hang up again. Seems like collars are hanging up on a bad spot. Work down to 11813', deeper than 11741' PBD (maybe cement cap on sand plug back collapsed, if sand had only been bridged).
	Lunch
	POH w/ tbg, 142 dbls. 2-7/8" chg. Over to 2 3/8" Equip. Cont. P.O.O.H. w/23 Dbls.
	Secure well.
	Drive to yard.

Operator: Aera Energy LLC
Well Name: EDISON 50
Aera Well Name: EDI50

Field: Ventura

Sec: 21 T: 3N R: 23W SB: B.&M.

County: Ventura
Rec'd 02-13-14 DOGGR D2 Ventura

API Number: 11104373

Name Megan Graves
(Person submitting report)

Title : AGENT
(President,Secretary, or Agent)

Date: 02/13/2014

11/21/2013

Depth:	Description:
	Traveled to the Aera lease.
	Attended the Aera monthly rig crew meeting.
	Drove to location.
	Held safety meeting. Filled out all required safety paper work. Inspected the location and the isolation points.
	Bled down the well. Opened and function tested the b.o.p.e.
	Continued with pulling the workstring out of the hole and laying it down. Layed down 16 Jts. 2 3/8" N -80 thirty-three 2-3/8" workstring joints.
	Lunch.
	Pulled out, broke out and layed down four 3-1/8" drill collars and the 4-1/2" 16.6# positive scraper with a 3-5/8" bit.
	Secured the well and location.
	Traveled back to the Nabors yard.

11/22/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Wait on Schlumberger. (Engineering did not wish to run TCP guns below bad spot in liner that was hanging up tbg collars, assumed to be at 11281'.)
	RU Schlumberger, RIH w/ 2-7/8" 20' blank HSD gun as dummy run. Tag at 11706' (so will be able to run 2-7/8" WL HSD's past bad spot.) POH, RD Schlumberger.
	Secure well.
	Drive to yard.

11/25/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	Spot in Gen. & bug fan, spot in schlumberger, R.I.H. & log liner.
	Lunch
	RIH w/ 2-7/8" HSD WL perf guns, perfed 11625' to 11645'. Run #2, perfed 11605' to 11625', 4 spf. RD Schlumberger. RIH w/ kill string 10 dbls. Land on donut.
	Secure well.
	Drive to yard.

Operator: Aera Energy LLC | Field: Ventura | County: Ventura
Rec'd 02-13-14 DOGGR D2 Ventura
Well Name: EDISON 50
Aera Well Name: EDI50
Sec: 21 T: 3N R: 23W SB: B.&M.

API Number: 11104373 Name Megan Graves (Person submitting report) Title : AGENT (President,Secretary, or Agent)

Date: 02/13/2014

11/26/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser Rig & Equip. bleed off well.
	Break
	P.O.O.H. w/kill string 10 dbls. R/U schlumberger Cont to perforate.
	Lunch
	Cont to perforate

Run 1	FL				gun	spf	
1	22'	11,585'	to	11,605'	20'	4	
2	25'	11,565'	to	11,585'	20'	4	
3	28'	11,545'	to	11,565'	20'	4	
4	33'	11,395'	to	11,415'	20,	4	Missfire
5	38'	11,395'	to	11,415'	20'	4	
6	44'	11,375'	to	11,395'	20'	4	
7	49'	11,355'	to	11,375'	20'	4	

R/D Schlumberger R.I.H. w/ kill string 10 dbls. Secure well.

Drive to yard.

11/27/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well
	Break
	P.O.O.H. w/kill string 10 dbls. R/U schlumberger, cont. to perforate.

Run	FL				gun	spf.	
1	33	11,335	to	11,355'	20'	4	
2	37	11,315	to	11,335	20'	4	
3	32	11,295'	to	11,315'	20'	4	
4	27	11,290'	to	11,295'	5'	4	
5	24	11,070'	to	11,090'	20'	4	(Don't know why Roupen didn't TCP everything above 11281' bad spot as discussed. - SEL)
6	25	11,050'	to	11,070'	20'	4	
7	23	11,030'	to	11,050'	20'	4	

R/D schlumberger, R.I.H. w/kill string 23 dbls. Land on donut. Secure well.

Drive to yard.

12/02/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	P.O.O.H. w/kill string 23 dbls. Spot in T.C.P. guns p/u & m/u 38 27/8" guns.
	Lunch
	R.I.H. w/tbg. To liner top @ 8928'
	Secure well.
	Drive to yard.

Operator: Aera Energy LLC | Field: Ventura | County: Ventura
Rec'd 02-13-14 DOGGR D2 Ventura
Well Name: EDISON 50
Aera Well Name: EDI50
Sec: 21 T: 3N R: 23W SB: B.&M.

API Number: 11104373 Name Megan Graves (Person submitting report) Title : AGENT (President,Secretary, or Agent)

Date: 02/13/2014

12/03/2013

Depth:	Description:
	Rig down for repair

12/04/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	Cont. R.I.H. w/tbg. T.C.P. guns to 10,989 R/U schlumberger wireline to do correlation. P.O.O.H. w/wireline, pull up B/O 6' pup jt. Pull up 6' & drop bar. Perforate. 10,195' to 10,325' 4 spf. 10,455' to 10,580' 4 spf. 10,640' to 10,970' 4 spf.
	P.O.O.H. w/ tbg. & guns @ E.O.T.
	Secure well.
	Drive to yard.

12/05/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	Cont. P.O.O.H. w/tbg. & guns L/D 10 jts. 27/8" j - 55 EUE &46 jts. 23/8" N -80 EUE. L/D 38 T.C.P. guns.
	Spot in 52 jts. 2 7/8" super Max w/special clearance collars 3.25 OD. R/U tester, M/U pump shoe & no-go collar w/4.00" OD fins. Measure 52 jts. 2 7/8" super Max. start R.I.H. picking up tbg. & testing @ E.O.T.
	Secure well.
	Drive to yard.

12/06/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well. Spot in ost crane load up perf. Guns
	Break
	R/U tester Cont. P/U 2 7/8" super max & testing 51 jts. Total. M/U anchor. R.I.H w/tbg. From derrick & testing. @ E.O.T.
	Secure well.
	Drive to yard.

12/09/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig & Equip. bleed off well.
	Break
	R/U tester cont. R.I.H. w/tbg. In derrick & testing. Chg. Over to 3 1/2 Equip. P/U 10 jts. 3 1/2 J -55 EUE & test.
	Lunch
	Land on donut R/D tester, tbg. Equip. & working floor. Strip off B.O.P. M/U landing mandrel & set anchor w/18,000 Run in donut studs, fill donut w/grease, M/U 5,000 psi. seal flange. M/U Prod. Tree. R/D mud pump & load out @ E.O.T.
	Secure well.
	Drive to yard.

Operator: Aera Energy LLC | Field: Ventura | County: Ventura

Rec'd 02-13-14 DOGGR D2 Ventura

Well Name: EDISON 50

Aera Well Name: EDI50

Sec: 21 T: 3N R: 23W SB: B.&M.

API Number: 11104373 Name Megan Graves (Person submitting report) Title : AGENT (President,Secretary, or Agent)

Date: 02/13/2014

12/10/2013

Depth:	Description:
	Travel to location.
	Fill out J.S.P. held safety meeting.
	Ser. Rig. Equip.
	Rig mast half mast .
	Wait on braun to turn power off.
	Cont. rigging down. Clean location.
	Lunch. NO PUMPING UNIT ON WELL. WILL RUN COROD LATER.

Perforation Report

BORE:	DATE	ASSEMBLY:	OPENING TYPE:	TOP:	BOTTOM:	DENSITY:	SIZE:
01	12/05/2013	5" Production Liner	PERFORATED	10,195.00	10,325.00	4.00	0.36
01	12/05/2013	5" Production Liner	PERFORATED	10,455.00	10,580.00	4.00	0.36
01	12/05/2013	5" Production Liner	PERFORATED	10,640.00	10,970.00	4.00	0.36
01	12/05/2013	4 1/2" Production Liner	PERFORATED	11,030.00	11,090.00	4.00	0.36
01	12/05/2013	4 1/2" Production Liner	PERFORATED	11,290.00	11,415.00	4.00	0.36
01	12/05/2013	4 1/2" Production Liner	PERFORATED	11,545.00	11,645.00	4.00	0.36

Rig Release

RIG RELEASE:

Date:	Time:
12/10/2013	11:00

L .PARTMENT OF CONSERVA. .JN

DIVISION OF OIL, GAS & GEOTHERMAL RESOURCES
1000 S. Hill Rd, Suite 116 Ventura, CA 93003-4458
Phone:(805) 654-4761 Fax:(805) 654-4765

REPORT ON OPERATIONS

No. T213-0445

Anthony Paulo
Aera Energy LLC (A0610)
3382 North Ventura Avenue
Ventura, CA 93001

Ventura, California
December 17, 2013

Your operations at well **"Edison" 50**, A.P.I. No. **111-04373**, Sec. **21**, T. **03N**, R. **23W**, **SB** B. & M., **Ventura** field, in **Ventura** County, were witnessed on **11/15/2013**. **Kris Gustafson**, a representative of the supervisor.

The operations were performed for the purpose of **inspecting the blowout prevention equipment and installation.**

DECISION:

APPROVED

Tim Kustic
State Oil and Gas Supervisor

By _____
Bruce Hesson
District Deputy

KG/tkc
OG109

API No. 111-04373 DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES T 213-0445 #12

BLOWOUT PREVENTION EQUIPMENT MEMO

Operator Aera Well Edison 50 Sec. 21 T. 03 R. 23
Field Oxnard County Ventura Spud Date

VISITS:	Date	Engineer	Time	Operator's Rep.	Title
1st	11/15/13	K. Gustafson	(0845 to 0920)	Not Present	
2nd			(to)		

Contractor Nabors Rig # 1437 Contractor's Rep. & Title Jesus Gonzalez RSS.
Casing record of well:

OPERATION: Testing ~~(inspecting)~~ the blowout prevention equipment and installation. Critical well? Y ☐ N ☐
DECISION: The blowout prevention equipment and its installation on the 7 " casing are approved.

Proposed Well Opns: Perforating & CO . MACP: psi
~~Hole size: " fr. to " to & " to~~

REQUIRED BOPE CLASS: II 2M

CASING RECORD OF BOPE ANCHOR STRING					Cement Details	Top of Cement	
Size	Weight(s)	Grade(s)	Shoe at	CP at		Casing	Annulus
7"	35#	N-80					

BOP STACK

API Symb.	Ram Size (in.)	Manufacturer	Model or Type	Vert. Bore Size (in.)	Press. Rtg.	Date Last Overhaul
Rd	2 7/8	Townsend		7"	2M	
Rd	CSO	"		"	"	

TEST DATA

Gal. to Close	Recov. Time (Min.)	Calc. GPM Output	psi Drop to Close	Secs. to Close	Test Date	Test Press.
12.0						1M *
2.0						1M
TOTAL: 4.0						

ACTUATING SYSTEM

Accumulator Unit(s) Working Pressure 3000 psi
Total Rated Pump Output ____ gpm Fluid Level
Distance from Well Bore 50 ft. OK @ 3000

	Accum. Manufacturer	Capacity	Precharge
1	Koomey Type	30 gal.	1200 psi
~~2~~		~~gal.~~	~~psi~~

CONTROL STATIONS	Elec.	Hyd.	Pneu.
Manifold at accumulator unit		✓	
Remote at Driller's station			✓
~~Other:~~			

EMERG. BACKUP SYSTEM			Press.	Wkg.Fluid
N_2 Cylinders	1	L= "		gal.
✓ Other: Hand pump unit @ accum.	2	L= "		gal.
	3	L= "		gal.
	4	L= "		gal.
	5	L= "		gal.
	6	L= "		gal.
	TOTAL:			gal.

AUXILIARY EQUIPMENT

		No.	Size (in.)	Rated Press	Connections: Weld	Flange	Thread	Test Press.
	Fill-up Line							
1	Kill Line		2"	2M			X	1M *
	Control Valve(s)							
	Check Valve(s)							
	Aux. Pump Cnnct.							
	Choke Line							
	Control Valve(s)							
	Pressure Gauge							
	Adjstble Choke(s)							
	Bleed Line							
	Upper Kelly Cock							
	Lower Kelly Cock							
	Standpipe Valve							
	Stndpipe Pres. Gau.							
	Pipe Safety Valve		2 7/8	5M				1M *
	~~Internal Preventer~~							

HOLE FLUID MONITORING EQUIPMENT	Alarm Type: Audible	Visual	Class
X Calibrated Mud Pit		✓	A
Pit Level Indicator			
~~Pump Stroke Counter~~			B
~~Pit Level Recorder~~			
Flow Sensor			C
Mud Totalizer			
~~Calibrated Trip Tank~~			
~~Other:~~			

Hole Fluid Type	Weight	Storage Pits (Type & Size)
KCl 4%	8.8	500 bbls.

REMARKS AND DEFICIENCIES:
CO monitoring on drillers floor.
* P-Test not witnessed by the Division inspector but reported by the RSS.

OGD9 (9/06)

URAL RESOURCES AGENCY OF CALIFORI
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS & GEOTHERMAL RESOURCES
1000 S. Hill Rd, Suite 116 Ventura, CA 93003 - 4458

PERMIT TO CONDUCT WELL OPERATIONS

No. P 213-0422

Old	New
814	814
FIELD CODE	
00	00
AREA CODE	
00	00
POOL CODE	

Ventura, California
November 8, 2013

Anthony Paulo, Agent
Aera Energy LLC (A0610)
3382 North Ventura Avenue
Ventura, CA 93001

Your proposal to **Rework** well **"Edison" 50**, A.P.I. No. **111-04373**, Section **21**, T. **03N**, R. **23W**, **SB** B. & M., **Ventura** field, **Ventura** County, dated **11/5/2013**, received **11/6/2013** has been examined in conjunction with records filed in this office.

THE PROPOSAL IS APPROVED PROVIDED:

1. Blowout prevention equipment, as defined by this Division's publication No. M07, shall be installed and maintained in operating condition and meet the following minimum requirements: **Class II 3M and a 3M lubricator if perforating is conducted with wireline.**
2. Hole fluid of a quality and in sufficient quantity to control all subsurface conditions in order to prevent blowouts shall be used.
3. This office shall be contacted by phone prior to making any program changes and no changes are made without prior Division approval.
4. **THIS DIVISION SHALL BE NOTIFIED TO:**
   a. **Inspect the installed blowout prevention equipment prior to commencing downhole operations.**

Note: The Division recommends, as a minimum, that carbon monoxide monitoring equipment and a vent line be installed and maintained in operating condition during all extensive perforating operations.

cc:
Misty Rogers
Aera Energy LLC
P.O. Box 11164
Bakersfield, CA 93389-1164

Blanket Bond Dated: 2/19/1998

Tim Kustic
State Oil and Gas Supervisor

Engineer Bruce Hesson
Office (805) 654-4761

By _____
Bruce Hesson, *District Deputy*

BH/bh

A copy of this permit and the proposal must be posted at the well site prior to commencing operations. Records for work done under this permit are due within 60 days after the work has been completed or the operations have been suspended. Issuance of this permit does not affect the Operator's responsibility to comply with other applicable state, federal, and local laws, regulations, and ordinances.

OG111 (revised 6/2011)

From: Rogers MR (Misty) at Aera [MRRogers@aeraenergy.com]
Sent: Tuesday, November 05, 2013 1:48 PM
To: DOGGR Dist2@DOC
Cc: Oaks Central Files; Richardson Consulting (richconinc@gmail.com)
Subject: "Edison" 50 Rework 11104373
Attachments: 11104373_Rework_11-05-2013.pdf

If possible we would like to possibly move on this well in the next couple days.

Thanks

Misty Rogers
Aera Oaks 2D137
Drilling Technical Associate
Ph: 661-665-5294
Fx: 661-665-3327
e-mail: mrrogers@aeraenergy.com

RAL RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMIAL RESOURCES

FOR DIVISION USE ONLY		
Bond	Forms	
	CALV WIMS	1151

NOTICE OF INTENTION TO REWORK / REDRILL WELL

P213-0422

814/00/00 OK

Detailed insturctions can be found at: www.conservation.ca.gov/dog/

In compliance with Section 3203, Division 3, Public Resources Code, notice is hereby given that it is our intention to rework/redrill well (circle one) Edison 50, API 111-04373

Sec. 21, T. 3N, R. 23W, SB B. & M., Ventura Field, Ventura County.

The complete casing record of the well(present hole), including plugs and perforations, is as follows:
(Attach wellbore schematics diagram also.)

The total depth is 12320 feet. The effective depth is 11741 feet.

Present completions zone 30 BLOCK, DR-FJ SAN Anticipated completion 0 BLOCK DF-F

Present zone pressure 5270 psi; New zone pressure 5300 psi;

Is this a critical well as defined in the California Code of Regulations, Title 14, to Section 1720(a) ☐ YES ☒ NO

For redrilling or deepening only, is a California Environmental Quality Act (CEQA) document required by a local agency? ☐ YES ☑ NO If yes, see next page.

The proposed work is as follows: (A complete program is preferred and may be attached.)

Add Pay and Recomplete

If well is to be redrilled or deepened, show proposed coordinates (from surface location) and true vertical depth at total depth: _____ feet. _____ (Direction) and _____ feet. _____ (Direction)

Will the Field and/or Area change ☐ YES ☑ NO If yes, specify New Field: _____ New Area: _____

The Division must be notified immediately of changes to the proposed operations. Failure to provide a true and accurate representation of the well and proposed operations may cause rescission of the permit.

Name of Operator			
Aera Energy LLC			
Address		City	Zip Code
P.O. Box 11164		Bakersfield, CA.	93389-1164
Name of Person Filing Notice	Telephone Number	Signature	Date
Anthony Paulo, Agent	(661) 665-5294		11/5/2013
Individual to contact for technical questions:	Telephone Number	E-Mail Address	

This notice and an indemnity or cash bond must be filed, and approval given, before the workover brings. (See the reverse side for bonding information.) If operations have not commenced within one year of the Division's receipt of the notice, this notice will be considered cancelled.

Rec'd 11-06-13 DOGGR D2 Ventura

File in Duplicate

OG 107 (1/09)

Aera Energy LLC

10000 Ming Ave.
Bakersfield, CA 93311

Workover Permit Application

11/5/2013 1:41:17PM

Legal Well Name : EDISON 50

Well Type : Producer
API Number 0411104373
DOG Field : Ventura C
Lease : Ventura D & N Block Unit
Section : 21

Aera Well Name: EDI50
Engineer : AF212077
Top of Fill : VNAN
Township 3N

Datum : KELLY BUSHING
Datum Elevation : 163.10
Datum to GL : 11.90
Range : 23W

Wellbore Configuration:

Wellbore #	Kick-Off Depth	Kicked From	Kick-Off Date	PBTMD	TMD
00	0	--None--	07/29/1949	9008	11,370
01	9000	00	05/31/1956	11,741	12,325

Job Type : WORKOVER **Objective : Add pay to existing compl.**

Casing: Wellbore#: 00
ASSEMBLY: 11 3/4" Casing TOP: 12 BOTTOM: 1010
INSTALL DATE: 08/01/1949 PULL DATE: PARALLEL?: N

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/GA:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:
Casing		12	47			J-55	LT&C	12	998	1010

Casing: Wellbore#: 00
ASSEMBLY: 7" Casing TOP: 5 BOTTOM: 10,699
INSTALL DATE: 09/23/1949 PULL DATE: PARALLEL?: N

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/GA:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:
Casing		7	26			N-80	X-LINE	5	4067	4072
Casing		7	29			N-80	X-LINE	4072	3507	7579
Casing		7	32			N-80	X-LINE	7579	1421	9000
		7	32			N-80	X-LINE	9000	26	9026
Casing		7	32			N-80	X-LINE	9026	1278	10,304
Casing		7	35			N-80	X-LINE	10,304	395	10,699
Casing Float Shoe		7						10,699	0	10,699

Casing: Wellbore#: 00
ASSEMBLY: 5" Production Liner TOP: 10,663 BOTTOM: 11,365
INSTALL DATE: 10/08/1949 PULL DATE: PARALLEL?: N

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/GA:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:
Casing		5	18			N-80		10,663	35	10,698
Slotted Liner		5	18	0	8	N-80		10,698	354	11,052
Slotted Liner		5	18	0	8	N-80		11,052	104	11,156
Casing		5	18			N-80		11,156	32	11,188
Slotted Liner		5	18	0	8	N-80		11,188	39	11,227
Casing		5	18			N-80		11,227	32	11,259
Slotted Liner		5	18	0	8	N-80		11,259	106	11,365

Casing: Wellbore#: 01
ASSEMBLY: 5" Production Liner TOP: 8928 BOTTOM: 11,008
INSTALL DATE: 05/31/1956 PULL DATE: PARALLEL?: N

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/GA:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:
Liner Hanger		5						8928	4	8932
Casing		5	20			R-2	8rd	8932	893	9825
Casing		5	18			N-80	X-LINE	9825	1183	11,008
Liner Port Collar		5						11,008	0	11,008

Casing: Wellbore#: 01
ASSEMBLY: 4 1/2" Production Liner TOP: 11,008 BOTTOM: 12,320
INSTALL DATE: 05/31/1956 PULL DATE: PARALLEL?: N

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/GA:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:
Liner Seal Adaptor		5						11,008	11	11,019
Holed Casing		5	17	0	0	E	8rd	11,019	722	11,741
Holed Casing		5	17	0	0	E	8rd	11,741	19	11,760
Holed Casing		5	17	0	0	E	8rd	11,760	295	12,055
Casing		5	11			R-2		12,055	114	12,169
Holed Casing		5	17	0	0	E	8rd	12,169	151	12,320

Rec'd 11-06-13 DOGGR D2 Ventura

Plug : Wellbore#: 00 — Cemented . . .

ASSEMBLY: Other Plug — TOP: 11,365 — BOTTOM: 11,370

INSTALL DATE : 10/08/1949 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
OTHER PLUG								11,365	5	11,370

Plug : Wellbore#: 00 — Cemented : N

ASSEMBLY: Bridge Plug — TOP: 11,052 — BOTTOM: 11,053

INSTALL DATE : 10/26/1951 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Bridge Plug		5.00						11,052	1	11,053

Plug : Wellbore#: 00 — Cemented : N

ASSEMBLY: BRIDGE PLUG — TOP: 10,560 — BOTTOM: 10,561

INSTALL DATE : 05/30/1956 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Cement Plug		7.00						10,560	0	10,560
CEMENT RETAINER		7.00						10,560	1	10,561

Plug : Wellbore#: 00 — Cemented : N

ASSEMBLY: Cement Plug — TOP: 9008 — BOTTOM: 11,052

INSTALL DATE : 05/30/1956 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Cement Plug								9008	18	9026
Cement Plug		7.00						9026	1637	10,663
Cement Plug		5.00						10,663	389	11,052

Plug : Wellbore#: 01 — Cemented : N

ASSEMBLY: Cement Plug — TOP: 12,320 — BOTTOM: 12,325

INSTALL DATE : 08/01/1956 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Cement Plug								12,320	5	12,325

Plug : Wellbore#: 01 — Cemented : N

ASSEMBLY: Cement Plug — TOP: 12,055 — BOTTOM: 12,320

INSTALL DATE : 08/18/1956 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Cement Plug		4.50						12,055	265	12,320

Plug : Wellbore#: 01 — Cemented : N

ASSEMBLY: Cement Plug — TOP: 11,741 — BOTTOM: 12,055

INSTALL DATE : 09/23/2011 — PARALLEL?: N

COMPONENT :	COUNT :	SIZE :	WEIGHT:	SLOT/GA:	DEN:	GRADE:	THREADS:	TOP :	LENGTH:	BOTTOM:
Cement Plug		4.50						11,741	19	11,760
		4.50						11,760	295	12,055

Perforations:

WB #	INSTALL DATE :	TOP:	BOTTOM:	SIZE:	DENSITY:	PERF TYPE :	PERF STATUS:	CHARGE DESCRIPTION:
00	10/20/1951	10,720	10,830	0.3750	2.00	PERFORATED	CLOSED	
00	10/20/1951	11,000	11,040	0.3750	2.00	PERFORATED	CLOSED	
01	08/01/1956	8950	8951	0.5000	4.00	PERFORATED	CLOSED	
01	08/01/1956	10,990	10,991	0.5000	4.00	PERFORATED	CLOSED	
01	08/01/1956	10,995	10,996	0.5000	4.00	PERFORATED	CLOSED	
01	08/01/1956	11,785	11,814	0.5000	2.00	PERFORATED	CLOSED	
01	08/01/1956	11,844	12,005	0.5000	2.00	PERFORATED	CLOSED	
01	08/01/1956	12,074	12,076	0.5000	8.00	PERFORATED	CLOSED	
01	08/01/1956	12,075	12,076	0.5000	4.00	PERFORATED	CLOSED	
01	08/01/1956	12,190	12,191	0.5000	8.00	PERFORATED	CLOSED	
01	08/01/1956	12,210	12,211	0.5000	4.00	PERFORATED	CLOSED	

Work Plan :	Planner : Scott Lavan, Contact @ 805-212-2289 or 805-648-8279

Plan Title : ED 50 Add Pay and Recomplete

STEP	Operations
1	

SUMMARY OF JOB for DOGGR permit application:

A) MIRU, install Class II 3000 BOPE, pull tubing
B) Scrape 4-1/2" x 3-1/2" liner & clean out to 11741' (PBD)
C) TCP perforate H14 block, DF-DM sands, 10195'-10580' (sel.), & T180 block, DM-FJ sands, 10640'- 11645' (selective)
D) Rerun tubing to 10500', RDMO
E) Rerun Corod and pump, RDMO

Present zone pressure: 5270 psi
Planned zone pressure: 5300 psi
Present completion zones: T180 block, DR- FJ sands
Planned completion zones: H14 and T180 blocks; DF-FJ sands
Total original well depth: 12320'
Effective depth 11741'

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

CHECK LIST-RECORDS RECEIVED AND WELL STATUS

OPERATOR **Aera Energy LLC** WELL DESIGNATION: **"Edison" 50**

API No. **11104373** SEC **21** , T. **3N** , R. **23W** , **SB** B. and M.

COUNTY: **Ventura** FIELD **Ventura**

Type of Notice: **Rework** **Date:** **3/15/2011** **Report Number:** **P211-069**

RECORDS RECEIVED (ATTACH PAGES IF REQUIRED)

	Date	OK	NEED	Remarks
Well Summary (OG100)	11/30/11			
History (OG103)				
E-Log				
Mud Log				
Dipmeter				
Directional				
Core and/or SWS				

NEW STATUS

DATE: 8/4

NOTICE OF RECORDS DUE

DATE: _____

DATE: _____

DATE: _____

DATE: _____

WELL STATUS INQUIRY

DATE: _____

DATE: _____

Well Stat

Change Required: ND

Change Done: _____

ABANDONMENTS/REABANDONMENTS/DRILLS/REDRILLS

ABANDONMENT DATABASE : _____ SURFACE INSPECTION NEEDED _____ COMPLETED _____
Date and Inspector

FINAL LETTER NEEDED _____ COMPLETED _____ DRILL/REDRILL DATABASE _____
(Date)

ENGINEER'S CHECK LIST

T-REPORT(S) _____ OPERATOR'S NAME _____ WELL DESIGNATION _____ SIGNATURE ✓

LOCATION _____ ELEVATION: _____ CONFIDENTIAL RELEASE DATE: 2 PERMIT REQUIREMENTS MET ✓

CLERICAL CHECK LIST

LOCATION CHANGE (OG165) _____ ELEVATION CHANGE (OG165) _____ RELEASE OF BOND (OG150) _____

REMARKS

RECORDS SCANNED: 12-12-11
(Date)

RECORDS APPROVED: 12-12-11
(Date and Engineer)

Modified OGD2

Rec'd 12-01-11 DOGGR D2 Ventura

SUBMIT IN DUPLICATE

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

HISTORY OF OIL OR GAS WELL

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50

Aera Well Name: EDI50 SEC: 21 T: 3N R: 23W S.B. B M.

API: 111-04373 Name: Anthony Paulo Title: Agent

Date: 11/30/11 (Person submitting report) (President, Secretary, or Agent)

Signature: Mustin Rogers

10000 Ming Ave.,Bakersfield, CA 93311 661-665-5294 MR Rogers

(Address) (Telephone Number)

History must be complete in all details. Use this form to report all operations during drilling and testing of the well or during redrilling or altering the casing, plugging, or abandonment with the dates thereof. Include such items as hole size, formation test details, amounts of cement used, top and bottom of plugs, perforation details, sidetracked junk, bailing test and initial production data.

KB: 11.9 Ft.

Date:	Daily Activity:
08/18/2011	
Depth:	Description:
	Travel Time
	brief wp & jsa
	time on Key Energy, check brakes out, rig down.
	Move from OST yard, had Braun electric turn power off to EDI50 & 52, do LOTO. Pressures 10 on tbg & 100 psi on csg, bled FL & remove FL's on both wells, lay plastic down, spot rig, tight location.
	lunch break
	RU & guy out, move unit head out of way. Bled well, all gas, run 2" hoses to slop tank.
	Secure well.
	Travel Time
08/19/2011	
Depth:	Description:
	Travel Time
	Brief wp & jsa, service equip, check well pressures 0 on tbg & 80 on csg
	Bleed csg psi, all gas, pump 30 bbls 3% KCl to keep gas down, well fill up, ND well head.
	PU on tbg, tbg wt 85,000#, slide tbg down thru BOP landing mandrel, unset 5" B-2 tbg anchor, tbg wt 65,000#, land tbg on half moons.
	installed bop on well.
	lunch break
	NU BOP, RU floor & tbg equip, function test bop, ok, hold safety meeting w/ third party, RU test truck, test BOP 400 low & 1000 psi high & hold for 10 mins each, test good, RD test truck.
	POH, 2-7/8" N-80 & J-55, tally, land tbg on donut.
	secure well
	Travel time
08/22/2011	
Depth:	Description:
	Travel Time
	Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg
	POH w/ 124 jts 2-7/8" j-55, change to 2-3/8", pooh 62 jts 2-3/8" N-80, LD 5" tbg anchor, no go collar, tbg drain, b/l shoe. Tally tbg.

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo Title: Agent

Date: 11/30/11 (Person submitting report) (President, Secretary, or Agent)

Date: Daily Activity:

lunch break

Tally & remove thread protectors off 2-3/8" 511 Hhydril (borrowed from Drilling). RIH w/ 2-3/8" 511 hydril STC, PU 38 jts 2-3/8" 511 Hydril, 62 jts 2-3/8" N-80, 164 jts 2-7/8" J-55, STC at 8100'.

land tbg on donut, secure well

Travel time

08/23/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

Continue RIH & tag at 12061'. TOC plugback plug is 12055', so no fill to clean out. Pump 30 bbls 3% KCl down tbg to make sure tbg wasn't plugged off, got returns back.

lunch break

r/o pump hose, secure well (cannot get Nabors cementers for plug back till AM)

Travel time

08/24/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

STC at 12059', RU Nabors cementers, hold safety meeting, pressure test line to 1000 psi, good. Mix & pump 14 ft3 Class C cmt w/ fluid loss additive & retarder, diplace w/ 62.9 bbls of water, top of cmt should be at 11857'. Pull up 6 jts of tbg, STC at 11861', mix & pump 14 ft3 of Class C cmt w/ fluid loss additives, displace w/ 62.2 bbls of water (wanted to do in 2 stages due to tight clearance of 2-3/8" x 4-1/2" DP liner). Top of cmt 11750', RD nabors, (crew lunch break 10:45 to 11:15).

POH 36 jts to 10751', reverse clean w/ 140 bbls 3% KCl at 2.0 bpm at 0-1000 psi, saw a little cmt, oil & dirt water, let well clean up.

secure well

Travel Time

08/25/2011

Depth: Description:

attend bop training in the Key yard

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

tbg was blowing oil, circ 50 bbls 3% KCl down tbg. RIH & tag TOC at 11857', cmt needs to be in 11735'-11765' interval. Make sure tbg isn't plugged off, STC at 11857'.

lunch break

RU Nabors cementers, held safety mtg, mix & pump 14 ft3 Class C cement w/ additives, displace w/ 60.5 bbls of water, r/o nabors, cmt should be at 11735' (pumped 40% excess this time)

Pull up 36 jts to 10751', reverse 130 bbls 3% kcl, didn't see any cmt, just dirt water, r/o pump

secure well

Travel Time

08/26/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg.

RIH & tag TOC at 11912', 55' deeper than yesterday (so must have been false high tag yesterday, and cement was lower than thought). RU Nabors cementers, hold safety meeting, pressure test line to 1000 psi, good. Mix & pump 14 ft3 of Class C cmt w/ additives, displace w/ 62.5 bbls of water, cmt should be at 11737'. Pull up 6 jts to 11736' for spotting 2nd stage, try pumping water, tbg pressured up to 1000 psi. Tried uplugging tbg, no success, RD Nabors. POH 30 jts wet. STC above 4-1/2 liner top, RU pump to try unplugging tbg, no success (crew took lunch break 10:45 to 11:15).

continue pooh w/ 180 jts of wet tbg, STC at 5430'.

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo Title: Agent

Date: 11/30/11 (Person submitting report) (President, Secretary, or Agent)

Date: Daily Activity:

Had Braun Electic turn power back on to EDI50 & 52, put together FL to production tee on EDI52 and turn back on for the weekend.

secure well

Travel Time

08/29/2011

Depth: Description:

Travel time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, do l/o t/o & turn off EDI52

continue pooh w/ wet tbg, pulled 70 jts of 2 7/8" tbg, 62 jts of 2 3/8" 8rd tbg,

lunch break

LD 38 jts 2-3/8" 511 Hydril tbg, found 29 jts (~900') full of cement. Hydrocrane moved off location.

hold safety meeting w third party, RU Excalibur SL, RIH w/ 1-1/2" bailer for tag to determine next cement plan, tagged at 11774', pooh w/ bailer, RD SL. SLavan decided this couldn't be TOC, since Friday AM tag had been 11912', then pumped 2.5 bbls cement Friday, and 900' of 2-3/8" has 3.5 bbl capacity, so no cement exited tbg (theoretically).

Hydrocrane unloaded more 2-3/8" 511 Hydril, tally & remove thread protectors, RIH 2-3/8" 511 STC, & PU 22 jts 2-3/8" 511 Hydril, STC at 680'.

secure well

put together f/l to production tee, start up EDI52 for the night.

Travel time

08/30/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

call R&R out to adjust brake on EDI52 unit, do l/o t/o & try, remove f/l

Continue PU 16 jts 2-3/8" 511 Hydril tbg, 62 jts 2-3/8" 8rd tbg, 32 jts 2-7/8" tbg.

lunch break

continue RIH, tag TOC at 11894', land tbg on donut (too late to cement today)

To make sure tbg didn't get plugged off, RU pump & pumped 25 bbls 3% kcl until got returns back.

secure well

put together f/l to production tee, remove locks, start EDI52 back up,

Travel Time

08/31/2011

Depth: Description:

N/C Waiting on Nabors cmt crew.

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

l/o t/o & SD EDI52, remove EDI52 FL. Spot in nabors cmt trucks, w/ STC at 11983' mixed & pump 14 CF3 Class G cmt w/ retarder, displace w/ 63 bbls of water, r/o hose, cmt should be t 11719'. POH w/ 6 jts tbg, STC at 11718'. Mixed & pumped 14 CF3 of Class G cmt w/ retarder, displace w/ 61 bbls water. RD Nabors, TOC should be at 11589'.

Tbg was stuck, worked tbg free, pulled 80,000#, tbg wt 64,000#. POH w/ 38 jts, STC at 10525'. RU pump to tbg, try pumping down tbg, tbg was plugged, try to unplug tbg, work psi up to 3200 psi & balance the tbg, no success. RU Nabors pump truck, pressure tbg to 5000 psi, tbg still plugged.

secure well, & put together f/l on EDI52 & start up well for the night.

Travel Time

09/01/2011

Depth: Description:

Travel time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

l/o t/o & try, remove flowline on EDI52

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo (Person submitting report) Title: Agent (President, Secretary, or Agent)

Date: 11/30/11

Date: Daily Activity:

rih w/ 42 jts of tbg & tag TOC @ 11876' (had been 11894' before yesterday's cement job, thief apparently drinking cement. Will add LCM next time - hadn't wanted to before, so LCM wouldn't bridge off on WWS and prevent cement from reaching sand face.) POH 80 jts of wet 2-7/8" tbg

lunch break

continue pooh w/ wet tbg, 196 jts of 2 7/8" tbg, 62 jts of 2 3/8" 8rd tbg, & l/d 38 jts 2-3/8" 511 Hydril tbg, 21 jts were full of cement.

secure well, put together f/l on EDI52 & start up unit.

Travel time

09/02/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip,

l/o t/o & try & remove f/l on EDI52 , help load & unload 2-3/8" 511 Hydril tbg, tally & remove thread protectors, p/u & rih w/ 2-3/8" 511 Hydril STC & 38 jts of 2-3/8" 511 Hydril tbg. RIH w/ 26 jts 2-3/8" 8rd tbg.

lunch break

Cont RIH w/ 36 jts 2-3/8" 8rd & 278 jts 2-7/8", STC at 11866'. TOC at 11876', stripped on pgsr.

secure well, put together f/l & start up EDI52.

Travel Time

09/06/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg

PU on tbg, had to pull 80,000# to free, lower tbg, STC at 11875', TOC at 11876'. RU Nabors cmtrs, fill well w/ 27 bbls of water & got returns (want to hold back pressure on backside, to control cement descent).

Mixed & pump 11.2 CF3 Class G cmt w/ retarder & LCM (cello-flake), displaced w/ 62 bbls of water, tbg was on a slight vacuum, pooh w/ 5 jts of tbg, 1st stage of cmt should be at 11727', STC at 11725'. Mixed & pump 11.2 CF3 of Class G cmt w/ retarder & LCM (cello-flake) for 2nd stage, displace w/ 61 bbls of water. RO Nabors, tbg on a slight vacuum, pooh w/ 14 jts of tbg, STC at 11280', cmt plug should be at 11587'. Reverse 180 bbls 3% KCl at 500 psi at 3.0 bpm, saw cmt twice, let well clean up. POH 24 jts. (crew took lunch 10:45 to 11:15)

secure well, put together EDI52 f/l & start up unit.

Travel Time

09/07/2011

Depth: Description:

Attend Key Monthly Safety Meeting

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o EDI52 & remove f/l

PU location, didn't want to tag until 9:00 am since Nabors' lab set wait 24 hrs for tag. RIH w/ 42 jts & tag TOC at 11823'. Talk to SLavan for next cmt attempt. Reverse one tbg volumn 65 bbls to clear tbg.

lunch break

Nabors arrived & had to take lunch break, hold safety meeting. STC at 11820', mixed & pump 11.2 CF3 of Class G cmt w/ retarder & LCM (cello-flake), displaced w/ 61.5 bbls water. RD Nabors, tbg on slight vacuum. POH 16 jts, STC at 11372', cmt plug should be at 11682'.

Reverse 180 bbls 3% KCl at 3.0 bpm at 400 psi, saw cmt twice, let well clean up. POH 24 jts, STC at 10500'.

secure well, put together f/l & start up EDI52

Travel Time

09/08/2011

Depth: Description:

tool truck got broken into over night

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo (Person submitting report) Title: Agent (President, Secretary, or Agent)

Date: 11/30/11

Date: Daily Activity:

RIH 42 jts, tag TOC at 11819', need to do more cmt, Nabors said they could be here 12:00. POH 10 jts, circulate 196 bbls 3% KCl at 400 psi at 3.0 bpm, tbg clear, didn't see any cmt.

lunch break

Now Nabors says won't be until 2:30 PM, too late to do cmt job, POH 16 jts, STC at 11000'.

secure well, put together f/l & start up EDI52

Travel Time

09/09/2011

Depth: Description:

Travel Time

Brief wp & jsa, Service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

RIH & TOC at 11819'. With STC at 11817', RU Nabors, mixed & pump 22.4 CF3 Class G cmt w/ retarder & LCM (cello-flakes), displace w/ 61.1 bbls of water, RD Nabors, tbg was blowing a little (U tube). POH 1500' to 10516', cmt plug should be at 11537', tbg stopped blowing after 5 stands. RU pump (crew took lunch 10:45 to 11:15).

Reversed clean 168 bbls 3% KCl at 2.8 bpm at 400 psi, didn't see any cmt, just dirty water.

secure well, put together f/l & start up EDI52

Travel Time

09/12/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

RIH 47 jts & tag TOC at 11438' (TOC desired is 11735'-11765' range), must have dragged stringers up hole. Talk w/ Engr, POH.

lunch break

POH.

PU & RIH w/ 3-5/8" bit & bit sub, bit @ 275'.

land tbg on donut, secure well, put together f/l & start up EDI52.

Travel Time

09/13/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

Cont RIH w/ bit.

lunch break

Cont RIH & tag TOC 11438', stripped on pgsr rubber.

RU PS, break circ at 2.8 bpm at 400 psi, drill out cmt from 11438' to 11469', let well clean up, hang power swivel, pooh to 10890' above liner top.

secure well, put together f/l & start up EDI52

Travel Time

09/14/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

RIH w/ tbg, circ at 2.8 bpmin at 400 psi, continue drilling out cmt from 11469' to 11672', fell thru, continue making connections down to 11747', didn't hit any cmt.

lunch break, (let well circulate during lunch)

Ccontinue RIH & tag TOC at 11,817' (gained 2' w/ last cement stage - ENGR DECIDED TO SWITCH TO SAND PLUG INSTEAD OF CEMENT), POH.

land tbg on donut, secure well, put together f/l & start up EDI52

Travel Time

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo Title: Agent

Date: 11/30/11 (Person submitting report) (President, Secretary, or Agent)

Date: Daily Activity:

09/15/2011

Depth:	Description:
	Travel to aera office
	Crew attend safety meeting w/ aera rep
	jsa, service equip, check well pressures 0 psi on tbg, l/o & remove f/l on EDI52
	l/d donut, continue PU & LD 36 jts 2-3/8" 511 Hydril tbg & 3-5/8" bit & bit sub, bit look good.
	lunch break
	WO 2-3/8" 511 Hydril bell collar from Weatherford, RIH w/ 2-3/8" 511 hydril bell collar, PU 38 jts 2-3/8" 511 Hydril, RIH to 11310'.
	secure well, ptu together f/l & start up EDI52.
	Travel Time

09/16/2011

Depth:	Description:
	Attend fire training at Key Yard.
	Travel Time
	Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52
	Unload 56 sacks of unsorted sand (from Lowe's - 1st time used). RU Weatherford funnel to tbg, dump 28 CF3 of sand (need ~7 ft3 theoretical), washing down w/ 3% KCl, RD funnel, TOS should be 11467'.
	lunch break
	secure well, put together f/l & start up EDI52
	Travel time

09/19/2011

Depth:	Description:
	Travel Time
	Brief wp & jsa, Service equip, check well pressures 100 psi on tbg & 0 on csg, bleed well off all gas, l/o & remove f/l on EDI52
	rih & tag sand at 11503', r/u poor boy swivel, break circ at 2.5 bpm at 400 psi, clean out sand from 11503' to 11624'.
	lunch break (well circulate during lunch break)
	continue cleaning out sand 11624' to 11760', let well clean up, r/o poor boy swivel
	pooh w/ 112 jts of 2 7/8" tbg
	secure well, start up EDI52
	Travel Time

09/20/2011

Depth:	Description:
	Travel Time
	Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg
	continue pooh, LD 2-3/8" 511 Hydril tbg
	lunch break
	Cont LD 511 Hydril tbg & bell collar
	ND PGSR, NU 8-900 7" shooting flange, change out 2-3/8" pipe rams to blind rams, function ok.
	RU Western WL, mixed cmt, RIH w/ 35' EL bailer & sit down at 11791', 31' deeper then tbg tally (but ignoring WL meas.), dump 0.75 1.52 ft3 of cmt, from 11760' to 11750.5'. POH. Make 2nd EL bailer run, dump cmt 11750.5' to 11741', POH. Truck broke down, repaired, RD WL.
	secure well start up EDI52
	Travel Time

09/21/2011

Depth:	Description:
	Attend Key awareness safety meeting

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo (Person submitting report) Title: Agent (President, Secretary, or Agent)

Date: 11/30/11

Date: Daily Activity:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & csg, l/o & remove f/l on EDI52

n/d shooting flange, n/u pgsr cage, installed 2 3/8" pipe rams, remove blind rams

RU tester, plug test 4 jts 2-3/8" tbg good to 6000 psi, rih w/ 2" new bottom lock shoe, 2 jts 2-3/8" N-80 8rd = 63.40', 2-3/8" x 5" B-2 tension anchor, 2 jts 2-3/8" N-80 8rd = 64.40', 2-3/8" flag nipple.

lunch break

MU test tools, test in w/ 58 jts 2-3/8" N-80 8rd = 1829.90', 2-3/8" x 2-7/8" crossover w/ no-go collar = 6", change tools, test in 174 jts 2-7/8" J-55 8rd = 5488'.

land tbg on donut, secure well, start up EDI52

Travel Time

09/22/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, check well pressures 0 psi on tbg & 120 psi on csg, bleed off csg. All gas, l/o & remove f/l on EDI52

Cont testing in to 6000 psi, 6 jts 2-7/8" J-55 8rd = 185', 2-7/8" flag nipple, 104 jts 2-7/8" N-80 8rd = 3204', all tbg tested good.

lunch break

r/o test unit, land tbg on donut

RO tbg equip, floor, pgsr, installed blind rams & remove 2 3/8" rams, ND 9" BOP, x-over flange. RU tbg tongs.

tbg wt 64,000 #, slide tbg thru bop mandrel & set 5" b-2 tension 20,000 # over strg wt at 10792', land tbg on half moon at 84,000#, 2" bottom lock shoe at 10856'.

load out tbg equip, screw in donut rams, fill top of donut w/ grease, NU 7-1/16" 5000 seal flange, put together production tee & f/l, put together f/l & start up EDI52.

Travel Time

09/23/2011

Depth: Description:

Travel Time

Brief wp & jsa, service equip, shut down well EDI52

Remove guide lines, start rigging down, got to half mast, shut down due to lightning in the area.

shut down due to lightning in area

lunch break

RDMO, clean location, start EDI52 back up, ready for co-rod on Monday.

Plug Report

PLUG DATE:	9/23/2011				
ASSEMBLY:	Cement Plug		BORE: 01	TOP:	11,741.00
PULL DATE:				BOTTOM:	12,055.00

COMPONENT:	TOP:	BOTTOM:	SIZE (in):	PLUG DETAIL:
Cement Plug	11,741.00	11,760.00	4.5000	
Sand Plug	11,760.00	12,055.00	4.5000	

09/26/2011

Depth: Description:

pre trip inspect , move rig to new location ,

review JSA lock out tag out ,try

remove flow lines , lock out unit EDI 52 , spot in transport reel 1st on location ,move in spot in corod rig , rig up unit

bleed down well , install BOP , pick up pump , make up on/off tool with rod , rig up transport reel containment arm to guide arm , feed corod into guide ,make up to pump/rod ,run in hole with corod ,rig down containment arm from guide arm , remove BOP,install polish rod and stuffing box ,including jewlery ,pressured up tubing in 4 strokes ,install unit head ,

Rec'd 12-01-11 DOGGR D2 Ventura

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: EDISON 50 SEC: 21 T: 3N R: 23W S.B. B. M.

API: 111-04373 Name: Anthony Paulo Title: Agent

Date: 11/30/11 (Person submitting report) (President, Secretary, or Agent)

Date: Daily Activity:

rig down corod unit , install flow lines to EDI 50 and EDI 52 ,clean up crew travel

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION

No. T 211-267

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

Report on Operations

Anthony Paulo, Agent
Aera Energy LLC
3382 North Ventura Ave.
Ventura, CA 93001

Ventura, California
Sept. 7, 2011

Your operations at well "Edison" 50 **, API No.** 111-04373
Sec. 21 **, T.** 3N **, R.** 23W **,** SB **B. & M.** Ventura
Field in Ventura **County,**
were witnessed on 8/25/2011 **by** M. Davis **, representative of the supervisor.**

Operations Witnessed	Result – Def.	Engineer	Date
BOPE Inspection	Approved – 0	M. Davis	8/25/2011

The operations were performed for the purpose of inspecting the blowout prevention equipment and installation.

DECISION: Approved

tkc

Elena M. Miller
State Oil and Gas Supervisor

By _____

District Deputy

OG109 Rev9/01 (9/89/GSR1/5M)

API No. 111-04373 DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES T 21-26?

BLOWOUT PREVENTION EQUIPMENT MEMO

Operator ALTA ENERGY LLC Well "EDISON" 50 Sec. 21 T. 3N R. 23W
Field VENTURA County VENTURA Spud Date

VISITS:	Date	Engineer	Time	Operator's Rep.	Title
1st	8-25-2011	M. DAVIS	(09:00 to)		
2nd			(to)		

Contractor KEY ENERGY Rig # 328 Contractor's Rep. & Title TROY BROWN - RIG SUPERVISOR
Casing record of well:

OPERATION: Testing (inspecting) the blowout prevention equipment and installation. Critical well? Y ☐ N ☑
DECISION: The blowout prevention equipment and its installation on the 7 " casing are approved.

Proposed Well Opns: REWORK . MACP: psi
Hole size: " fr. ' to ', " to ' & " to '

REQUIRED BOPE CLASS: II 2M

CASING RECORD OF BOPE ANCHOR STRING					Cement Details	Top of Cement	
Size	Weight(s)	Grade(s)	Shoe at	CP at		Casing	Annulus

BOP STACK

API Symb.	Ram Size (in.)	Manufacturer	Model or Type	Vert. Bore Size (in.)	Press. Rtg.	Date Last Overhaul
RD	2 7/8	TOWNSEND		9"	3M	
RD	2 7/8	" "		9"	3M	

TEST DATA

Gal. to Close	Recov. Time (Min.)	Calc. GPM Output	psi Drop to Close	Secs. to Close	Test Date	Test Press.

ACTUATING SYSTEM

Accumulator Unit(s) Working Pressure 2000 psi
Total Rated Pump Output gpm Fluid Level
Distance from Well Bore 50 ft. 3/4

	Accum. Manufacturer	Capacity	Precharge
1	KEY ENERGY	gal.	1950 psi
2		gal.	psi

CONTROL STATIONS	Elec.	Hyd.	Pneu.
X Manifold at accumulator unit		X	
X Remote at Driller's station			X
Other:			

EMERG. BACKUP SYSTEM			Press.	Wkg.Fluid
X N_2 Cylinders	1	L= "	2500	gal.
Other:	2	L= "	2500	gal.
	3	L= "		gal.
	4	L= "		gal.
	5	L= "		gal.
	6	L= "		gal.
	TOTAL:			gal.

HOLE FLUID MONITORING EQUIPMENT	Alarm Type: Audible	Alarm Type: Visual	Class
Calibrated Mud Pit			A
Pit Level Indicator			
Pump Stroke Counter			B
Pit Level Recorder			
Flow Sensor			C
Mud Totalizer			
Calibrated Trip Tank			
Other:			

TOTAL:

AUXILIARY EQUIPMENT

	No.	Size (in.)	Rated Press	Connections: Weld	Connections: Flange	Connections: Thread	Test Press.
X Kill Line		2"	3M			X	
X Control Valve(s)	3		3M			X	
Check Valve(s)							
Aux. Pump Cnnct.							
Choke Line							
Control Valve(s)							
Pressure Gauge							
Adjstble Choke(s)							
Bleed Line							
Upper Kelly Cock							
Lower Kelly Cock							
Standpipe Valve							
Stndpipe Pres. Gau.							
X Pipe Safety Valve		2 1/16	3M				
Internal Preventer							

Hole Fluid Type	Weight	Storage Pits (Type & Size)
3% KCL		500 BBLS.

REMARKS AND DEFICIENCIES:

OGD9 (9/06)

NATURAL RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMAL RESOURCES

No. P **211-069**

PERMIT TO CONDUCT WELL OPERATIONS

814	814
(Old) Field Code	(New)
00	00
(Old) Area Code	(New)
00	00
(Old) Pool Code	(New)

Anthony Paulo, Agent
Aera Energy LLC
3382 North Ventura Ave.
Ventura, CA 93001

Ventura, California
March 25, 2011

Your proposal to **rework** well **"Edison" 50**, A.P.I. No. **111-04373**, Section **21**, T. **3N**, R. **23W**, **S.B.** B. & M., **Ventura** Field, **Ventura**, County, dated **03/15/11**, received **03/17/11** has been examined in conjunction with records filed in this office.

THE PROPOSAL IS APPROVED PROVIDED:

1. Blowout prevention equipment, as defined by this Division's publication No. MO7, shall be installed and maintained in operating condition and meet the following minimum requirements: Class II 2M
2. Hole fluid of a quality and in sufficient quantity is used to control all subsurface conditions in order to prevent blowouts.
3. No program changes are made without Division approval.
4. **THIS DIVISION SHALL BE NOTIFIED TO:**
   a. Inspect the installed blowout prevention equipment prior to commencing downhole operations.

cc: Misty Rogers
Aera Energy LLC
PO Box 11164
Bakersfield CA 93389

Engineer: Steve Fields

Phone: (805) 654-4761

Elena M. Miller
State Oil and Gas Supervisor

By _____
Bruce Hesson, District Deputy

A copy of this permit and the proposal must be posted at the well site prior to commencing operations. Records for work done under this permit are due within 60 days after the work is completed or the operations have been suspended. Issuance of this permit does not preclude the recipient from the obligation of being in compliance with all applicable Federal, State and Local laws, regulations and ordinances.

OG 111

NATURAL RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMIAL RESOURCES

FOR DIVISION USE ONLY		
Bond	Forms OGD114	OGD121
BB	111	115

NOTICE OF INTENTION TO REWORK / REDRILL WELL

P211-069

Detailed insturctions can be found at: www.conservation.ca.gov/dog/

In compliance with Section 3203, Division 3, Public Resources Code, notice is hereby given that it is our intention to rework/redrill well (circle one) **Edison 50**, API **111-04373** OG

Sec. **21**, T. **3N**, R. **23W**, **SB** B. & M., **Ventura** Field, **Ventura** County.

The complete casing record of the well(present hole), including plugs and perforations, is as follows:
(Attach wellbore schematics diagram also.)

The total depth is **0** feet. The effective depth is **0** feet.

Present completions zone _____ Anticipated completion _____

Present zone pressure **N/A psi;** New zone pressure **N/A psi;**

Is this a critical well as defined in the California Code of Regulations, Title 14, to Section 1720(a) ☐ YES ☒ NO

For redrilling or deepening only, is a California Environmental Quality Act (CEQA) document required by a local agency? ☐ YES ☑ NO If yes, see next page.

The proposed work is as follows: (A complete program is preferred and may be attached.)

Cement FO-T180 to 11750'

MAR 17 2011

If well is to be redrilled or deepened, show proposed coordinates (from surface location) and true vertical depth at total depth: _____ feet. _____ (Direction) and _____ feet. _____ (Direction)

Will the Field and/or Area change ☐ YES ☑ NO If yes, specify New Field: _____ New Area: _____

The Division must be notified immediately of changes to the proposed operations. Failure to provide a true and accurate representation of the well and proposed operations may cause rescission of the permit.

Name of Operator			
Aera Energy LLC			
Address		City	Zip Cod
P.O. Box 11164		Bakersfield CA.	93389-1164
Name of Person Filing Notice	Telephone Number	Signature	Date
Danny Tuazon, Agent	(661) 665-5294	Misty Rogers	3/15/2011
Individual to contact for technical questions:	Telephone Number	E-Mail Address	

This notice and an indemnity or cash bond must be filed, and approval given, before the workover brgins. (Seethe reverse side for bonding information.) If operations have not commenced within one year of the Devision's receipt of the notice, this notice will be considered cancelled.

OG 107 (1/09)

File in Duplicate

Aera Energy LLC

10000 Ming Ave.,B
kersfield, CA 93311

Workover Permit Application

3/15/2011 8:27:09 AM

Legal Well Name: EDISON 50

Well Type: Producer
API#: 111-04373
DOG Field:
Lease: Ventura D & N Block Unit
Section: 21

Aera Well Name: EDI50
Engineer: BI822267
Top of Fill: 12,198
Township: 03N

Datum: Derrick Floor
Datum Elevation: 163.10
Datum to GL: 11.90
Range: 23W

Wellbore Configuration:

DFW Bore	Enterprise Bore	Kick-Off Depth	Kicked from	Kick-Off_Date	PBTMD	TMD	Rig_Release_Date
OH	0000	0		29-Jul-49	9,008	11,370	10-Oct-49
01	0001	9,000	OH	31-May-56	12,055	12,325	21-Aug-56

Job Type: WORKOVER **Objective: Permanently plug back well**

Current Configuration

Date Issued: 2/18/2011

Casing: Wellbore#: OH(00) String Code: C1 Cemented: Y

ASSEMBLY: 11 3/4" Casing TOP: 0 BOTTOM: 1,010
DETAIL: INSTALL DATE: 8/1/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Casing: Blank	11.750	47.00	0.000	0	J-55	LT&C	0	1,010	

Casing: Wellbore#: OH(00) String Code: C2 Cemented: Y

ASSEMBLY: 7" Casing TOP: 0 BOTTOM: 10,699
DETAIL: INSTALL DATE: 9/23/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Casing: Blank	7.000	35.00	0.000	0	N-80	X-LINE	0	5	
Casing: Blank	7.000	26.00	0.000	0	N-80	X-LINE	5	4,072	
Casing: Blank	7.000	29.00	0.000	0	N-80	X-LINE	4,072	7,579	
Casing: Blank	7.000	32.00	0.000	0	N-80	X-LINE	7,579	9,000	
Window cut out of Casing/Liner	7.000	32.00	0.000	0	N-80	X-LINE	9,000	9,026	
Casing: Blank	7.000	32.00	0.000	0	N-80	X-LINE	9,026	10,304	
Casing: Blank	7.000	35.00	0.000	0	N-80	X-LINE	10,304	10,699	
Casing Float Shoe	7.000	0.00	0.000	0			10,699	10,699	

Liner: Wellbore#: 01(01) String Code: L1 Cemented: Y

ASSEMBLY 5" Production Liner TOP: 8,928 BOTTOM: 11,008
DETAIL: INSTALL DATE: 8/1/1956

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner Hanger	5.000	0.00	0.000	0			8,928	8,932	
Liner: Blank	5.000	19.50	0.000	0	R-2	8rd	8,932	9,825	
Liner: Blank	5.000	18.00	0.000	0	N-80	X-LINE	9,825	11,008	
Liner Port Collar	5.000	0.00	0.000	0			11,008	11,008	

MAR 17 2011

Liner: Wellbore#: OH(00) | String Code: L2 | Cemented: N

ASSEMBLY 5" Production Liner | TOP: 10,663 | BOTTOM: 11,365

DETAIL: | INSTALL DATE: 10/8/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner: Blank	5.000	18.00	0.000	0	N-80		10,663	10,698	
Liner: Slotted	5.000	18.00	0.015	8	N-80		10,698	11,052	Plugged
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,052	11,156	Ineffective
Liner: Blank	5.000	18.00	0.000	0	N-80		11,156	11,188	
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,188	11,227	Ineffective
Liner: Blank	5.000	18.00	0.000	0	N-80		11,227	11,259	
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,259	11,365	Ineffective

Liner: Wellbore#: 01(01) | String Code: L3 | Cemented: N

ASSEMBLY 4 1/2" Production Liner | TOP: 11,008 | BOTTOM: 12,320

DETAIL: | INSTALL DATE: 5/31/1956

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner Seal Adapter	4.500	0.00	0.000	0			11,008	11,019	
Liner: Perforated (Pre-Drilled)	4.500	16.60	0.375	8	E	8rd	11,019	12,055	Open
Liner: Blank	4.500	10.66	0.000	0	R-2		12,055	12,169	
Liner: Perforated (Pre-Drilled)	4.500	16.60	0.375	8	E	8rd	12,169	12,320	Plugged

Plugs: Wellbore#: 01(01)

ASSEMBLY Cement Plug | INSTALLED: 8/18/1956 | TOP: 12,055 | BOTTOM: 12,320

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	4.500	0.00			12,055	12,320

Plugs: Wellbore#: 01(01)

ASSEMBLY Other Plug | INSTALLED: 8/1/1956 | TOP: 12,320 | BOTTOM: 12,325

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Plug_Other	0.000	0.00			12,320	12,325

Plugs: Wellbore#: OH(00)

ASSEMBLY Cement Plug | INSTALLED: 5/30/1956 | TOP: 9,008 | BOTTOM: 11,052

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	0.000	0.00			9,008	9,026
Cement Plug	7.000	0.00			9,026	10,663
Cement Plug	5.000	0.00			10,663	11,052

Plugs: Wellbore#: OH(00)

ASSEMBLY Cement Retainer w/ Cement Cap | INSTALLED: 5/30/1956 | TOP: 10,560 | BOTTOM: 10,560

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	7.000	0.00			10,560	10,560
Cement Retainer	7.000	0.00			10,560	10,560

Plugs: Wellbore#: OH(00)

ASSEMBLY Bridge Plug | INSTALLED: 10/26/1951 | TOP: 11,052 | BOTTOM: 11,052

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Bridge Plug	5.000	0.00			11,052	11,052

Plugs: Wellbore#: OH(00)

ASSEMBLY Other Plug | INSTALLED: 10/8/1949 | TOP: 11,365 | BOTTOM: 11,370

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Plug_Other	0.000	0.00			11,365	11,370

MAR 17 2011

Perforations:

STRING CODE:	INSTALL DATE:	TOP:	BOTTOM:	SIZE:	DENSITY:	PERF TYPE:	PERF STATUS:
L1	6/1/1956	8,950	8,950	0.5000	4.00	WSO_HOLES	Ineffective
L2	10/20/1951	10,720	10,830	0.3750	2.00	RE_PERF	Plugged
L1	7/1/1956	10,990	10,990	0.5000	4.00	WSO_HOLES	Ineffective
L1	7/1/1956	10,995	10,995	0.5000	4.00	WSO_HOLES	Ineffective
L2	10/20/1951	11,000	11,040	0.3750	2.00	RE_PERF	Plugged
L3	7/1/1956	11,785	11,814	0.5000	2.00	RE_PERF	Open
L3	7/1/1956	11,844	12,005	0.5000	2.00	RE_PERF	Open
L3	7/1/1956	12,074	12,076	0.5000	8.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,075	12,075	0.5000	4.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,190	12,190	0.5000	8.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,210	12,210	0.5000	4.00	WSO_HOLES	Ineffective


Work Plan: **Planner: SELavan**

PLAN TITLE Cement FO-T180 to 11750'

STEP OPERATION

1 SUMMARY OF WORK for DOGGR PERMIT APPLICATION:

A) Pull Corod and pump from 10890'
B) Install BOPE, pull tubing
C) Scrape 4-1/2" liner to tight spot at 11979'
D) Plug back w/ cement from PBD at 12055' to 11750'+- (to isolate FO-T180, believed to be high water production)
E) Rerun tubing & Corod to same depth as pulled
F) RDMO



NATURAL RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMAL RESOURCES

No. P **211-069**

814 (Old) Field Code 814 (New)
00 (Old) Area Code 00 (New)
00 (Old) Pool Code 00 (New)

PERMIT TO CONDUCT WELL OPERATIONS

Anthony Paulo, Agent
Aera Energy LLC
3382 North Ventura Ave.
Ventura, CA 93001

Ventura, California
March 25, 2011

Your proposal to **rework** well **"Edison" 50**, A.P.I. No. **111-04373**, Section **21**, T. **3N**, R. **23W**, **S.B.** B. & M., **Ventura** Field, **Ventura**, County, dated **03/15/11**, received **03/17/11** has been examined in conjunction with records filed in this office.

THE PROPOSAL IS APPROVED PROVIDED:

1. Blowout prevention equipment, as defined by this Division's publication No. MO7, shall be installed and maintained in operating condition and meet the following minimum requirements: Class II 2M
2. Hole fluid of a quality and in sufficient quantity is used to control all subsurface conditions in order to prevent blowouts.
3. No program changes are made without Division approval.
4. **THIS DIVISION SHALL BE NOTIFIED TO:**
   a. Inspect the installed blowout prevention equipment prior to commencing downhole operations.

cc: Misty Rogers
Aera Energy LLC
PO Box 11164
Bakersfield CA 93389

Engineer: Steve Fields

Phone: (805) 654-4761

Elena M. Miller
State Oil and Gas Supervisor

By _____
Bruce Hesson, District Deputy

A copy of this permit and the proposal must be posted at the well site prior to commencing operations. Records for work done under this permit are due within 60 days after the work is completed or the operations have been suspended. Issuance of this permit does not preclude the recipient from the obligation of being in compliance with all applicable Federal, State and Local laws, regulations and ordinances.

OG 111

NATURAL RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMIAL RESOURCES

FOR DIVISION USE ONLY		
Bond	Forms OGD114	OGD121
BB	111	115

NOTICE OF INTENTION TO REWORK / REDRILL WELL

P211-069

Detailed insturctions can be found at: www.conservation.ca.gov/dog/

In compliance with Section 3203, Division 3, Public Resources Code, notice is hereby given that it is our intention to rework/redrill well (circle one) **Edison 50**, API **111-04373** 069

Sec. **21**, T. **3N**, R. **23W**, **SB** B. & M., **Ventura** Field, **Ventura** County.

The complete casing record of the well(present hole), including plugs and perforations, is as follows:
(Attach wellbore schematics diagram also.)

The total depth is **0** feet. The effective depth is **0** feet.

Present completions zone _____ Anticipated completion _____

Present zone pressure **N/A psi;** New zone pressure **N/A psi;**

Is this a critical well as defined in the California Code of Regulations, Title 14, to Section 1720(a) ☐ YES ☒ NO

For redrilling or deepening only, is a California Environmental Quality Act (CEQA) document required by a local agency? ☐ YES ☑ NO If yes, see next page.

The proposed work is as follows: (A complete program is preferred and may be attached.)

Cement FO-T180 to 11750'

MAR 17 2011

If well is to be redrilled or deepened, show proposed coordinates (from surface location) and true vertical depth at total depth: _____ feet. _____ (Direction) and _____ feet. _____ (Direction)

Will the Field and/or Area change ☐ YES ☑ NO If yes, specify New Field: _____ New Area: _____

The Division must be notified immediately of changes to the proposed operations. Failure to provide a true and accurate representation of the well and proposed operations may cause rescission of the permit.

Name of Operator			
Aera Energy LLC			
Address		City	Zip Cod
P.O. Box 11164		Bakersfield, CA.	93389-1164
Name of Person Filing Notice	Telephone Number	Signature	Date
Danny Tuazon, Agent	(661) 665-5294	Misty Rogers	3/15/2011
Individual to contact for technical questions:	Telephone Number	E-Mail Address	

This notice and an indemnity or cash bond must be filed, and approval given, before the workover brgins. (Seethe reverse side for bonding information.) If operations have not commenced within one year of the Devision's receipt of the notice, this notice will be considered cancelled.

OG 107 (1/09)

File in Duplicate

Aera Energy LLC

10000 Ming Ave.,B
kersfield, CA 93311

Workover Permit Application

3/15/2011 8:27:09 AM

Legal Well Name: EDISON 50

Well Type: Producer
API#: 111-04373
DOG Field:
Lease: Ventura D & N Block Unit
Section: 21

Aera Well Name: EDI50
Engineer: BI822267
Top of Fill: 12,198
Township: 03N

Datum: Derrick Floor
Datum Elevation: 163.10
Datum to GL: 11.90
Range: 23W

Wellbore Configuration:

DFW Bore	Enterprise Bore	Kick-Off Depth	Kicked from	Kick-Off_Date	PBTMD	TMD	Rig_Release_Date
OH	0000	0		29-Jul-49	9,008	11,370	10-Oct-49
01	0001	9,000	OH	31-May-56	12,055	12,325	21-Aug-56

Job Type: WORKOVER **Objective: Permanently plug back well**

Current Configuration

Date Issued: 2/18/2011

Casing: Wellbore#: OH(00) String Code: C1 Cemented: Y

ASSEMBLY: 11 3/4" Casing TOP: 0 BOTTOM: 1,010
DETAIL: INSTALL DATE: 8/1/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Casing: Blank	11.750	47.00	0.000	0	J-55	LT&C	0	1,010	

Casing: Wellbore#: OH(00) String Code: C2 Cemented: Y

ASSEMBLY: 7" Casing TOP: 0 BOTTOM: 10,699
DETAIL: INSTALL DATE: 9/23/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Casing: Blank	7.000	35.00	0.000	0	N-80	X-LINE	0	5	
Casing: Blank	7.000	26.00	0.000	0	N-80	X-LINE	5	4,072	
Casing: Blank	7.000	29.00	0.000	0	N-80	X-LINE	4,072	7,579	
Casing: Blank	7.000	32.00	0.000	0	N-80	X-LINE	7,579	9,000	
Window cut out of Casing/Liner	7.000	32.00	0.000	0	N-80	X-LINE	9,000	9,026	
Casing: Blank	7.000	32.00	0.000	0	N-80	X-LINE	9,026	10,304	
Casing: Blank	7.000	35.00	0.000	0	N-80	X-LINE	10,304	10,699	
Casing Float Shoe	7.000	0.00	0.000	0			10,699	10,699	

Liner: Wellbore#: 01(01) String Code: L1 Cemented: Y

ASSEMBLY 5" Production Liner TOP: 8,928 BOTTOM: 11,008
DETAIL: INSTALL DATE: 8/1/1956

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner Hanger	5.000	0.00	0.000	0			8,928	8,932	
Liner: Blank	5.000	19.50	0.000	0	R-2	8rd	8,932	9,825	
Liner: Blank	5.000	18.00	0.000	0	N-80	X-LINE	9,825	11,008	
Liner Port Collar	5.000	0.00	0.000	0			11,008	11,008	

MAR 17 2011

Liner: Wellbore#: OH(00) — String Code: L2 — Cemented: N

ASSEMBLY: 5" Production Liner — TOP: 10,663 — BOTTOM: 11,365

DETAIL: — INSTALL DATE: 10/8/1949

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner: Blank	5.000	18.00	0.000	0	N-80		10,663	10,698	
Liner: Slotted	5.000	18.00	0.015	8	N-80		10,698	11,052	Plugged
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,052	11,156	Ineffective
Liner: Blank	5.000	18.00	0.000	0	N-80		11,156	11,188	
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,188	11,227	Ineffective
Liner: Blank	5.000	18.00	0.000	0	N-80		11,227	11,259	
Liner: Slotted	5.000	18.00	0.015	8	N-80		11,259	11,365	Ineffective

Liner: Wellbore#: 01(01) — String Code: L3 — Cemented: N

ASSEMBLY: 4 1/2" Production Liner — TOP: 11,008 — BOTTOM: 12,320

DETAIL: — INSTALL DATE: 5/31/1956

COMPONENT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	BOTTOM:	SLOT STATUS:
Liner Seal Adapter	4.500	0.00	0.000	0			11,008	11,019	
Liner: Perforated (Pre-Drilled)	4.500	16.60	0.375	8	E	8rd	11,019	12,055	Open
Liner: Blank	4.500	10.66	0.000	0	R-2		12,055	12,169	
Liner: Perforated (Pre-Drilled)	4.500	16.60	0.375	8	E	8rd	12,169	12,320	Plugged

Plugs: Wellbore#: 01(01)

ASSEMBLY: Cement Plug — INSTALLED: 8/18/1956 — TOP: 12,055 — BOTTOM: 12,320

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	4.500	0.00			12,055	12,320

Plugs: Wellbore#: 01(01)

ASSEMBLY: Other Plug — INSTALLED: 8/1/1956 — TOP: 12,320 — BOTTOM: 12,325

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Plug_Other	0.000	0.00			12,320	12,325

Plugs: Wellbore#: OH(00)

ASSEMBLY: Cement Plug — INSTALLED: 5/30/1956 — TOP: 9,008 — BOTTOM: 11,052

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	0.000	0.00			9,008	9,026
Cement Plug	7.000	0.00			9,026	10,663
Cement Plug	5.000	0.00			10,663	11,052

Plugs: Wellbore#: OH(00)

ASSEMBLY: Cement Retainer w/ Cement Cap — INSTALLED: 5/30/1956 — TOP: 10,560 — BOTTOM: 10,560

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Cement Plug	7.000	0.00			10,560	10,560
Cement Retainer	7.000	0.00			10,560	10,560

Plugs: Wellbore#: OH(00)

ASSEMBLY: Bridge Plug — INSTALLED: 10/26/1951 — TOP: 11,052 — BOTTOM: 11,052

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Bridge Plug	5.000	0.00			11,052	11,052

Plugs: Wellbore#: OH(00)

ASSEMBLY: Other Plug — INSTALLED: 10/8/1949 — TOP: 11,365 — BOTTOM: 11,370

COMPONENT	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	BOTTOM:
Plug_Other	0.000	0.00			11,365	11,370

MAR 17 2011

Perforations:

STRING CODE:	INSTALL DATE:	TOP:	BOTTOM:	SIZE:	DENSITY:	PERF TYPE:	PERF STATUS:
L1	6/1/1956	8,950	8,950	0.5000	4.00	WSO_HOLES	Ineffective
L2	10/20/1951	10,720	10,830	0.3750	2.00	RE_PERF	Plugged
L1	7/1/1956	10,990	10,990	0.5000	4.00	WSO_HOLES	Ineffective
L1	7/1/1956	10,995	10,995	0.5000	4.00	WSO_HOLES	Ineffective
L2	10/20/1951	11,000	11,040	0.3750	2.00	RE_PERF	Plugged
L3	7/1/1956	11,785	11,814	0.5000	2.00	RE_PERF	Open
L3	7/1/1956	11,844	12,005	0.5000	2.00	RE_PERF	Open
L3	7/1/1956	12,074	12,076	0.5000	8.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,075	12,075	0.5000	4.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,190	12,190	0.5000	8.00	WSO_HOLES	Ineffective
L3	7/1/1956	12,210	12,210	0.5000	4.00	WSO_HOLES	Ineffective


Work Plan: **Planner: SELavan**

PLAN TITLE Cement FO-T180 to 11750'

STEP OPERATION

1 SUMMARY OF WORK for DOGGR PERMIT APPLICATION:

A) Pull Corod and pump from 10890'
B) Install BOPE, pull tubing
C) Scrape 4-1/2" liner to tight spot at 11979'
D) Plug back w/ cement from PBD at 12055' to 11750'+- (to isolate FO-T180, believed to be high water production)
E) Rerun tubing & Corod to same depth as pulled
F) RDMO



SUBMIT IN DUPLICATE

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

HISTORY OF OIL OR GAS WELL

Operator: Aera Energy LLC Field: Ventura County: Ventura

Legal Well Name: **Edison 50** SEC: 21 T: 3N R: 23W S.B. B&M.

API: **111-04373** Name: Stanley D. Bell (Person submitting report) Title: IRT Engineer (President, Secretary, or Agent)

Date: 03/21/2007 Signature: Stanley D. Bell

P.O. Box 11164, Bakersfield, CA. 93389-1164 (Address) (661) 665-5310 (Telephone Number)

History must be complete in all details. Use this form to report all operations during drilling and testing of the well or during redrilling or altering the casing, plugging, or abandonment with the dates thereof. Include such items as hole size, formation test details, amounts of cement used, top and bottom of plugs, perforation details, sidetracked junk, bailing test and initial production data.

MECHANICAL INTEGRITY PRESSURE TEST

Date:	Daily Activity:
07/08/2005	MIRU Rig. Bled well down. CWI.
07/11/2005	Bled well down. Killed well. R/U work floor and tubing equipment. N/D wellhead. N/U BOPE. Unlanded hanger. No tubing in well. M/U 5" casing scraper and bumper sub. P/U and tallied 2-3/8" work string. Started RIH w/ casing scraper. Crossed over to 2-7/8" tubing. P/U and tallied 2-7/8" work string. Continued RIH w/ scraper. Well kicked, but able to control well. CWI.
07/12/2005	Bled well down. Killed well w/ produced water. Continued P/U 2-7/8" tubing and RIH. CWI.
07/13/2005	Bled well down. Killed well w/ produced water. Continued P/U 2-7/8" tubing and RIH. Tagged top of 4-1/2" liner @ 11,019'. POOH w/ 200 joints of 2-7/8" tubing. CWI.
07/14/2005	Bled well down. Killed well w/ produced water. POOH w/ 2-7/8" tubing, x-over and 2-3/8" tubing. POOH & L/D bumper sub and scraper. M/U test packer. RIH w/ packer on 2-3/8" x 2-7/8" work string to 11,015'. Set packer @ 11,015' and pressure tested 7" casing and 5" liner to 1000 psig for 15 minutes. Casing and liner tested good. CWI.
07/15/2005	Bled well down. Killed well w/ produced water. Released packer. Started POOH & L/D work string. CWI.
07/18/2005	Bled well down. Killed well w/ produced water. Finished POOH and L/D work string and packer. R/D pump, work floor, and tubing equipment. N/D BOPE. N/U well head. RDMO Rig.

RECEIVED
MAR 26 2007

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

REPORT OF CORRECTION OR CANCELLATION

Ventura, California
April 20, 2004

Kim Drews, Agent
AERA ENERGY LLC
3382 North Ventura Ave.
Ventura, CA 93001

In accordance with your supplementary notice dated April 6, 2002 to cancel P203-118

the following change pertaining to your well "Edison" 50 (111-04373),
(Well designation)
Ventura field, Ventura County,

Sec. 21, T. 3N, R. 23W, SB B. &M., is being made to our records:

☐ The corrected location is

☐ The corrected elevation is

☐ Report No. , dated , has been

Corrected as follows:

☒ Your notice to rework dated May 19, 2003,
(Drill, abandon, etc.)
and our report No. P 203-118, issued in answer thereto, are hereby cancelled

Inasmuch as the work will not be done. If you have an individual bond on file covering this notice, it will be returned.

No request for such return is necessary.

☐ Other:

Hal Bopp
State Oil and Gas Supervisor

By
Deputy Supervisor
Bruce H. Hesson

tkc

OG165

OPERATOR AERA ENERGY LLC
WELL NO. "EDISON" 50
MAP

A.P.I. 111 - 04373
SECTION 21, T. 3 N, R. 23 W

INTENTION	REWORK					
NOTICE DATED	05/19/2003					
P-REPORT NUMBER	P203-118					
CHECKED BY/DATE						
MAP LETTER DATED						
SYMBOL						

	REC'D	NEED	REC'D	NEED	REC'D	NEED	REC'D	NEED	REC'D	NEED	REC'D	NEED
NOTICE	05/23/03											
HISTORY												
SUMMARY												
E-LOG												
MUD LOG												
DIPMETER												
DIRECTIONAL												
CORE/SWS												
CBL												

ENGINEERING CHECK

T-REPORTS						
OPERATOR'S NAME						
WELL NO.						
LOC & ELEV						
SIGNATURE						
SURFACE INSP.						
DRILL CARD						

RECORD'S COMPLETE _____ _____ _____ _____ _____ _____

FINAL LETTER OK _____
MAILED _____
RELEASED BOND _____

INJECTION BOOK _____
IDLE WELL LIST _____
SURFACE INSP. CARD _____

REMARKS: _____

OK TO RELEASE FROM CONFIDENTIAL _____
ABANDONED-REMOVED FROM E.D.P. _____

STATE OF CALIFORNIA
DEPARTMENT OF CONSERVATION

DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

SUPPLEMENTARY NOTICE

P204-36

FOR DIVISION USE ONLY		
BOND	FORMS	
	OGD 114	OGD 121
1,500,000	111 ✓	115 ✓

A notice to the Division of Oil, Gas, and Geothermal Resources, dated **5/19/2003**, stating the intention to

REWORK (Drill, Rework, Abandon) **Edison 50**, API **111-04373**

Sec. **21**, T. **3N**, R. **23W** **SB** B. & M., **Ventura** Field,

Ventura County, should be amended because of changed conditions.

1. The complete casing record of the well (present hole), including plugs and perforations, is as follows:

2. Total Depth **0** feet. Effective Depth **0** feet.

3. Present completions zone _____ Anticipated completions zone _____

4. Present zone pressure **N/A** New zone pressure **N/A**

We now propose: (A complete program is preferred and may be attached.)

PLEASE CANCEL PERMIT NO. P203-118 TO ADD PERFS. WE NO LONGER INTEND TO DO THE WORK AT THIS TIME. WILL REPERMIT AT A LATER DATE WHEN PLAN TO DO THE WORK.

RECEIVED
APR - 9 2004
DIVISION OF OIL, GAS AND GEOTHERMAL RESOURCES
VENTURA, CALIFORNIA

Note: If well is to be redrilled, show proposed new bottom-hole coordinates and estimated true vertical depth.

It is understood that if changes in this plan become necessary, we are to notify you immediately.

Name of Operator		Type of Organization (Corporation, Partnership, Individual, etc.)	
Aera Energy LLC		Company	
Address		City	Zip Code
P.O. Box 11164		Bakersfield, CA.	93389-1164
Telephone Number	Name of Person Filing Notice	Signature	Date
(661) 665-5294	Kim Drews, Agent	Misty Rogers	4/6/2004

OG 123

File in Duplicate

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

No. P203-118

PERMIT TO CONDUCT WELL OPERATIONS

814 (field code)
00 (area code)
00 (new pool code)
00 (old pool code)

Randy De Smidt, Agent
Aera Energy LLC
3382 North Ventura Ave.
Ventura CA 93001

Ventura, California
May 23, 2003

Your _____ proposal to rework well "Edison" 50,
A.P.I. No. 111-04373 Sec. 21, T. 3N, R. 23W, SB B.&M.,
Ventura field, ------- area, ---------- pool
Ventura County, dated 05/19/2003 received 05/23/2003 has been examined in conjunction with records filed in this office.

THE PROPOSAL IS APPROVED PROVIDED THAT:

1. Blowout prevention equipment conforming to DOGGR Class II 2M requirements shall be installed and maintained in operating conditions at all times.
2. Hole fluid of a quality and in sufficient quantity is used to control all subsurface conditions in order to prevent blowouts.
3. Wire line operations are conducted through at least a 2M lubricator.
4. The Division will routinely monitor monthly well production data, and if anomalous water production is indicated, remedial action will be required.
5. This office shall be consulted before initiating any changes or additions to this proposed operationor if operations are to be suspended.
6. **THIS DIVISION SHALL BE NOTIFIED:**
   a. To inspect the installed blowout prevention equipment prior to commencing downhole operations.

cc: Misty Rogers, Aera Energy LLC

Super Blanket Bond
SAF:sf

Engineer Steven A. Fields

Phone (805) 654-4761

Hal Bopp, State Oil and Gas Supervisor

By _____ Deputy Supervisor

A copy of this permit and the proposal must be posted at the well site prior to commencing operations.

Records for work done under this permit are due within 60 days after the work has been completed or the operations have been suspended.

STATE OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

NOTICE OF INTENTION TO REWORK / REDRILL WELL

P203-118

C.E.Q.A. INFORMATION (when redrilling or deepening only)			
Exempt ☐ Class_____	Neg.Dec. ☐ S.C.H. No.	E.I.R. ☐ S.C.H. No.	Document not required by local jurisdiction ☐

FOR DIVISION USE ONLY		
BOND	FORMS	
	OGD 114 ✓	OGD 121 ✓
1,000,000	111 ✓	115 ✓

This notice and indemnity or cash bond shall be filed, and approval given, before rework/redrill begins. If operations have not commenced within one year of recipt of the notice, this notice will be considered cancelled.

In compliance with Section 3203, Division 3, Public Resources Code, notice is hereby given that it is our intention to rework/redrill well (circle one) **Edison 50**, API **111-04373**

Sec. **21**, T. **3N**, R. **23W** **SB** B. & M., **Ventura** Field, **Ventura** County.

1. Total Depth **12055** feet. Effective Depth **0** feet.
2. Complete casing record, including plugs and perforations (present hole).
   SEE ATTACHED
3. Present completions zone _____ Anticipated completion _____
4. Present zone pressure **N/A psi;** New zone pressure **N/A psi;**
5. Last produced _____ (Date) N/A (Oil, B/D) N/A (Water, B/D) N/A (Gas, Mcf/D)
   (or)
   Last injected _____ (Date) N/A (Water / Steam, B/D) N/A (Gas, Mcf/D) N/A (Surface pressure, psig)
6. Is this a critical well according to Section 1720(a), California Code of Regulation **No**

THE PROPOSED WORK IS AS FOLLOWS:

SELECTIVELY PERF 6H14/6T180 IN 10,000'- 11,000' INTERVALS.

RECEIVED
MAY 23 2003
By VTA DOGGR

SEE ATTACHED WORKSHEET

Note: If well is to be redrilled, show proposed new bottom-hole coordinates and estimated true vertical depth.

It is understood that if changes in this plan become necessary, we are to notify you immediately.

Name of Operator		Type of Organization (Corporation, Partnership, Individual, etc.)	
Aera Energy LLC		Company	
Address		City	Zip Code
P.O. Box 11164		Bakersfield, CA.	93389-1164
Telephone Number	Name of Person Filing Notice	Signature	Date
(661) 665-5294	Randy De Smidt, Agent	Mindy Rogers	05/19/2003

OG 107

File in Duplicate

Workover Permit Applicat

Aera Energy LLC
P.O. Box 11164
Bakersfield, CA. 93389-1164

05/19/2003 2:05:13 PM

Legal Well Name: EDISON 50

Well Type: Producer
API#: 111-04373
DOG Field: VENTURA
Lease: EDISON
Section: 21
Township: 03N
Range: 23W

Aera Well Name: EDI50
Engineer: Lavan
Top of Fill: 12,055.00

Datum: GROUND LEVEL
Datum Elevation: 163.00
Datum to GL: 0.00

Wellbore Configuration:

DFW Bore	Enterprise Bore	Kick-Off Depth	Kicked from	Kick-Off_Date	Bore PBTMD	Bore TMD
OH	0000	0.00		29-Jul-49	9,026.00	11,370.00
01	0001	9,000.00	OH	31-May-56	12,055.00	12,325.00

Job Type: PLAN **Objective: Add Perfs and RTP** **Date Issued:** 05/19/2003

Current Configuration

Casing: Wellbore#: OH() String Code: C1 Cemented: N

ASSEMBLY: 11 3/4" Casing **TOP:** 0.00 **BOTTOM:** 1,010.00
DETAIL: **INSTALL DATE:** 10/11/1949

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:	SLOT STATUS:
Casing: Blank	0	11.750	47.00	0.000	0	J-55	LT&C	0.00	1,010.00	1,010.00	

Casing: Wellbore#: OH() String Code: C2 Cemented: N

ASSEMBLY: 7" Casing **TOP:** 0.00 **BOTTOM:** 10,699.00
DETAIL: **INSTALL DATE:** 10/11/1949

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:	SLOT STATUS:
Casing: Blank	0	7.000	35.00	0.000	0	N-80		0.00	5.00	5.00	
Casing: Blank	0	7.000	26.00	0.000	0	N-80		5.00	4,067.00	4,072.00	
Casing: Blank	0	7.000	29.00	0.000	0	N-80		4,072.00	3,507.00	7,579.00	
Casing: Blank	0	7.000	32.00	0.000	0	N-80		7,579.00	1,421.00	9,000.00	
Window cut out of Casing/Liner	0	7.000	32.00	0.000	0	N-80		9,000.00	26.00	9,026.00	
Casing: Blank	0	7.000	32.00	0.000	0	N-80		9,026.00	1,278.00	10,304.00	
Casing: Blank	0	7.000	35.00	0.000	0	N-80		10,304.00	395.00	10,699.00	

Liner: Wellbore#: 01() String Code: L1 Cemented: N

ASSEMBLY 5" Stacked Liner **TOP:** 8,928.00 **BOTTOM:** 11,019.00
DETAIL: **INSTALL DATE:** 06/01/1956

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:	SLOT STATUS:
Liner Hanger	0	5.000	0.00	0.000	0			8,928.00	4.00	8,932.00	
Liner: Blank	0	5.000	19.50	0.000	0	R-2		8,932.00	893.00	9,825.00	
Liner: Blank	0	5.000	18.00	0.000	0	R-3		9,825.00	1,183.00	11,008.00	
Liner Port Collar	0	5.000	0.00	0.000	0			11,008.00	11.00	11,019.00	

RECEIVED
MAY 23 2003
BY

Liner: Wellbore#: OH() String Code: L2 Cemented: N

ASSEMBLY 5" Production Liner **TOP:** 10,663.00 **BOTTOM:** 11,365.00

DETAIL: **INSTALL DATE:** 10/12/1949

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:	SLOT STATUS:
Liner: Blank	0	5.000	18.00	0.000	0	N-80		10,663.00	35.00	10,698.00	
Liner: Slotted	0	5.000	18.00	0.015	8	N-80		10,698.00	458.00	11,156.00	CLSD_CBK
Liner: Blank	0	5.000	18.00	0.000	0	N-80		11,156.00	32.00	11,188.00	
Liner: Slotted	0	5.000	18.00	0.015	8	N-80		11,188.00	39.00	11,227.00	CLSD_CBK
Liner: Blank	0	5.000	18.00	0.000	0	N-80		11,227.00	32.00	11,259.00	
Liner: Slotted	0	5.000	18.00	0.015	8	N-80		11,259.00	106.00	11,365.00	CLSD_CBK

Liner: Wellbore#: 01() String Code: L3 Cemented: N

ASSEMBLY 4 1/2" Production Liner **TOP:** 11,019.00 **BOTTOM:** 12,320.00

DETAIL: **INSTALL DATE:** 05/31/1956

COMPONENT:	COUNT:	SIZE:	WEIGHT:	SLOT/ GAUGE:	DENSITY:	GRADE:	THREADS:	TOP:	LENGTH:	BOTTOM:	SLOT STATUS:
Liner: Perforated (Pre-Drilled)	0	4.500	16.60	0.375	8	E		11,019.00	1,036.00	12,055.00	OPEN
Liner: Blank	0	4.500	16.60	0.000	0	E		12,055.00	114.00	12,169.00	
Liner: Perforated (Pre-Drilled)	0	4.500	16.60	0.375	8	E		12,169.00	151.00	12,320.00	OPEN

Plugs: Wellbore#: 01() Attached to String:

ASSEMBLY Cement Plug **INSTALLED:** 08/28/1956 **TOP:** 12,055.00 **BOTTOM:** 12,325.00

COMPONENT	COUNT:	SIZE:	WEIGHT:	COMPANY:	MODEL:	TOP	LENGTH:	BOTTOM:
Cement Plug	0	0.000	0.00			12,055.00	270.00	12,325.00

Perforations:

STRING CODE:	INSTALL DATE:	TOP:	BOTTOM:	SIZE:	DENSITY:	PERF TYPE:	PERF STATUS:	CHARGE DESCRIPTION:
L3	05/31/1956	8,950.0	8,950.0	0.5000	4.00	PERFORATED	CLSD_CMT	
L1	10/20/1951	10,720.0	10,830.0	0.3750	2.00	PERFORATED	CLSD_CBK	
L3	05/31/1956	10,990.0	10,990.0	0.5000	4.00	PERFORATED	OPEN	
L3	05/31/1956	10,995.0	10,995.0	0.5000	4.00	PERFORATED	CLSD_CMT	
L1	10/20/1951	11,000.0	11,040.0	0.3750	2.00	PERFORATED	CLSD_CBK	
L3	05/31/1956	11,785.0	11,814.0	0.5000	2.00	PERFORATED	OPEN	
L3	05/31/1956	11,844.0	12,005.0	0.5000	2.00	PERFORATED	OPEN	
L3	05/31/1956	12,074.0	12,076.0	0.5000	8.00	PERFORATED	CLSD_CBK	
L3	05/31/1956	12,075.0	12,075.0	0.5000	4.00	PERFORATED	CLSD_CMT	
L3	05/31/1956	12,190.0	12,190.0	0.5000	8.00	PERFORATED	CLSD_CMT	
L3	05/31/1956	12,210.0	12,210.0	0.5000	4.00	PERFORATED	CLSD_CMT	


Work Plan:

PLAN TITLE RTP

STEP OPERATION

1 SUMMARY OF WORK FOR DOG PERMIT APPLICATION:

1) MIRU on idle producer, install BOPE
2) Pressure test 7" casing
3) Selectively perf 6H14/6T180 in 10000' - 11000' interval
4) Run tubing, RDMO. Run Corod and pump and RTP



RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS, AND GEOTHERMAL RESOURCES

REPORT OF PROPERTY AND WELL TRANSFER

Field or county		District
Ventura		2 Ventura
Former owner	**Operator code**	**Date**
CalResources LLC	C1360	June 1, 1997

Name and location of well(s)

ALL WELLS

Sections 19,20,21,22,23,24,25,26,27,28,29 & 30, T. 3N, R. 23W SBB&M

Sections 19 & 30, T. 3N, R. 22W SBB&M

Description of the land upon which the well(s) is (are) located

Date of transfer, sale, assignment, conveyance, or exchange	New owner	Operator code	Type of organization
June 1, 1997	AERA Energy LLC	A0610	Limited Liability Company
	Address: P.O. Box 11164, Bakersfield, CA 93389-1164		Telephone No.: (805) 326-5000

Reported by
CalResources LLC

Confirmed by
AERA Energy LLC

New operator new status (status abbreviation)	Request designation of agent
PA	
Old operator new status (status abbreviation)	**Remarks**
	NAME CHANGE ONLY

Deputy Supervisor	Signature
Patrick J. Kinnear	Patrick J. Kinnear

OPERATOR STATUS ABBREVIATIONS

PA – Producing Active
NPA – No Potential, Active
PI – Potential Inactive
NPI – No Potential, Inactive
Ab – Abandoned or No More Wells

FORM AND RECORD CHECK LIST

Form or record	Initials	Date	Form or record	Initials	Date
Form OGD121	TKC		Map and book 215	SPM	12-12-98
Form OGD140	TKC		Notice to be cancelled		
New well cards			Bond status		
Well records	TKC		EDP files	TKC	
Electric logs	TKC		Computer Files		
Production reports					

OGD156 (5/98)

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL, GAS AND GEOTHERMAL RESOURCES

REPORT OF PROPERTY AND WELL TRANSFER

Field or county Ventura		District 2--VENTURA
Former owner Shell Western E. & P. Inc.	Opcode: S3100	Date March 22, 1995

Name and location of well(s)

Sections 19,20,21,22,25,27,28,29, and 30, T. 3N., R. 23W., SBB&M

ALL WELLS

Sec. 23-T3N-R23W., SBB&M

"McGonigle" 1 (111-04453)

Description of the land upon which the well(s) is (are) located

Date of transfer, sale, assignment, conveyance, or exchange 1/1/95	New owner Cal Resources LLC	Opcode: C1360	Type of organization Limited Liability Company
	Address 5060 California Avenue Bakersfield, California 93309		Telephone No. (805) 326-5109

Reported by
Shell Western E. & P. Inc.

Confirmed by Cal Resources LLC

New operator new status (status abbreviation) PA	Request designation of agent
Old operator new status (status abbreviation) PI	Remarks See letter dated March 9, 1995

	Deputy Supervisor Patrick J. Kinnear	Signature for PJK

OPERATOR STATUS ABBREVIATION
PA - Producing Active
NPA - No Potential Active
PI - Potiential Inactive
NPI - No Potiential Inactive
Ab - Abandoned or No More Wells

FORM AND RECORD CHECK LIST

Form or record	Initials	Date	Form or record	Initials	Date
Form OGD121	TKC	3-27-95	Map and Book 215	SPM	3/27/95
Well records	TKC	3-27-95	Notice to be cancelled		
Logs	TKC	3-27-95	EDP	JTC	3/9/95
Bond Status			District Computer Files	SF	3/22/95

OGD156 (Modified 1/95)

FORM OGD156 (5-80)

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL AND GAS

REPORT OF PROPERTY AND WELL TRANSFER

Field or county	District
Ventura	2
Former owner	**Date**
Shell Calif. Production Inc.	May 18, 1987

Name and location of well(s)

Sections 19, 20, 21, 22, 23, 25, 27, 28, 29, and 30, T. 3N., R. 23W., SBB&M

(ALL WELLS EXCEPT THOSE ABANDONED PRIOR TO 7/1/82)

Description of the land upon which the well(s) is (are) located

Date of transfer, sale, assignment, conveyance, or exchange	New owner	Type of organization
4-1-87	Shell Western E. & P. Inc.	Corp.
	Address P.O. Box 11164 Ventura, CA 93389-1164	**Telephone No.** 805-326-5000

Reported by
Shell Calif. Production Inc.

Confirmed by
SWEPI

New operator new status (status abbreviation)	Request designation of agent
PA	
Old operator new status (status abbreviation)	**Remarks**
PA	(NAME CHANGE ONLY)

Deputy Supervisor, Acting
Michael Stettner

Signature
Michael Stettner

OPERATOR STATUS ABBREVIATIONS

PA – Producing Active
NPA – No Potential, Active
PI – Potential Inactive
NPI – No Potential, Inactive
Ab – Abandoned or No More Wells

FORM AND RECORD CHECK LIST

Form or record	Initials	Date	Form or record	Initials	Date
Form OGD121	✓		Map and book		
Form ODG148			Notice to be cancelled		
New well cards			Bond status		
Well records			EDP files		
Electric logs					
Production reports					

RESOURCES AGENCY OF CALIFORNIA
DEPARTMENT OF CONSERVATION
DIVISION OF OIL AND GAS

REPORT OF PROPERTY AND WELL TRANSFER

Field or county	District
Ventura	2
Former owner	**Date**
Shell Oil Company	Feb. 2, 1983

Name and location of well(s)

Sections 19, 20, 21, 22, 23, 25, 27, 28, 29, and 30, T. 3N., R. 23W.

ALL WELLS EXCEPT THOSE ABANDONED PRIOR TO 7/1/82

Description of the land upon which the well(s) is (are) located

Date of transfer, sale, assignment, conveyance, or exchange	New owner	Type of organization
7/1/82	Shell California Production Inc. Address P.O. Box 92047 Worldway Center Los Angeles, CA 90009	Corp. Telephone No.

Reported by: Shell Oil Company

Confirmed by: Shell Oil Company

New operator new status (status abbreviation)	Request designation of agent
PA	
Old operator new status (status abbreviation)	**Remarks**
PA	NAME CHANGE ONLY

Deputy Supervisor	Signature
Murray W. Dosch	M. Dosch

OPERATOR STATUS ABBREVIATIONS

PA – Producing Active
NPA – No Potential, Active
PI – Potential Inactive
NPI – No Potential, Inactive
Ab – Abandoned or No More Wells

FORM AND RECORD CHECK LIST

Form or record	Initials	Date	Form or record	Initials	Date
Form OGD121			Map and book		
Form ODG148			Notice to be cancelled		
New well cards			Bond status		
Well records			EDP files		
Electric logs					
Production reports					

P-38 (Rev. 5-63) Printed in U.S.A.

SHELL OIL COMPANY

RECONDITIONING REPORT

111-04373

Ventura (FIELD) | Ventura (COUNTY) | 9-20-80 (FROM) 9-21-80 (TO) | Edison 50 (SECTION OR LEASE) | Sec. 21, T-3-N, R-23-W (TOWNSHIP OR RANGE)

DATE | Unit C — REMARKS (SHOW SIZE AND TYPE TOOLS RUN)

Proposal: Retire production equipment.

DIVISION OF OIL AND GAS
RECEIVED
MAR 16 1981
SANTA PAULA, CALIFORNIA

Edison 50

9-20-80 MIRU. Bled well and removed tree. Rigged for laying down tubing. Pulled and laid down 285 joints 2 7/8" 8rd N-80. Laid down 70 joints 2 3/8" 8rd N-80 with valves and packer. Ran 1 joint 2 7/8" tubing. Tore out equipment. Shut down at 10:30 p.m.

9-21-80 Tore and loaded out Hydril and accum. lines. Installed tree. RDMO at 10:30 a.m.

CONDITION AT END OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZE

CONDITION AFTER WORK (CROSS OUT ALL BUT APPROPRIATE ITEMS)

DEPTH (ORIGINAL) _____ TOP PLUG (P) OR BRIDGE (B) _____

DEPTH LAST (PB OR SD.) _____ TOP FISH (F) OR JUNK (J) _____

DEPTH PRESENT EFFECTIVE _____ LAS CSG. (C) OR LINER (L) _____

NOTE—IN ADDITION TO REPORTING ROUTINE RECONDITIONING OPERATIONS, USE THIS FORM FOR REPORTING THE FIRST INSTALLATION OF PUMPING EQUIPMENT (UNLESS WELL WAS ORIGINALLY COMPLETED ON THE PUMP), SAG CASING, FISH LEFT IN HOLE ETC., THAT MAY OCCUR AS A RESULT OF PRODUCING OR SHUT-DOWN OPERATIONS.

DEP

SIGNED

HO 412 MASTER SET 5-51 PRINTED IN U. S. A. 11-51

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956

SHELL OIL COMPANY

SAN FRANCISCO, CALIFORNIA

Date September 27, 1956

B. P. M.
Shell Union
San Francisco
Los Angeles—LAND DEPT.
—LEGAL DEPT.
—EXPLOITATION ENGINEER

RE-
WELL/COMPLETION REPORT

SANTA PAULA, CALIFORNIA

No.

NAME and/or No. Edison 50

Company Shell Oil

Field Ventura

Re-enter
~~Spudding~~ Date 5-31-56

Re- Completion Date 8-28-56

Elevation 163' (D.F.)

Total Depth 12325' De.

Plugged Back Depth. 12055'

Location 1390.65' North and 1812.75' West from R.C.L. Corner No. 11.

Sec. 21, T. 3N., R. 23 W., S.B.B. & M.

Interval Produced 11019/12055'

11-3/4 "casing		cemented at	1010
7 "casing	Window	~~cemented~~ at	9000/9026
7 "casing	W.S.O.	~~cemented~~ at	8950
"casing		landed/hung at	
4-1/2 & 5" ~~casing~~	Liner	cemented thru perfs. at	10995
4-1/2 & 5" liner		~~landed~~/hung at	12320
4-1/2 & 5"	Liner	top at	8928
2" & 2-7/8" tubing		~~hung~~ Landed at	10508

Perforations: 1187' in 4-1/2" liner
11019/12055', 12169/12320'
(Stancliff wire-wrapped)

Reperforated:
11785/11814', 11844/12005'
(two 1/2" jets per foot).

Production Data	Initial Production	Addtl. Prod. Data	~~Calculated Potential~~
Date	8-28-56	9-1-56	9-20-56
Manner of Producing	Gas Lifting (16 hr-rate)	Gas Lifting	Gas Lifting
Gross Fluid—B/D	252	332	552
Clean Oil—B/D	76	53	144
Cut—%	70.0	84.0	74.0
Gravity—°A.P.I. (Dry/Wet)			
Free Water—B/D			
Salt in Water—Grs./U.S. Gal.			
Gas—M.C.F.	?	?	251
Gas Oil Ratio			1740
Gasoline—Gallons/M.C.F.			
Size Orifice—Tubing	32/64"	32/64"	32/64"
Size Orifice—Casing			
Pressures—Tubing	60	300	150
Pressures—Casing	1400	1300	1200

Remarks:

Division Exploitation Engineer Jim Fillmore

Division Superintendent K M Cannon

MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

REDRILLING REPORT
FOR PERIOD ENDING
8-28-56
DEEPENING

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956
SANTA PAULA, CALIFORNIA

DAY	DEPTHS FROM	DEPTHS TO	REMARKS

LAST PRODUCTION:

	STATUS	DAYS PROD.	CLEAN OIL	B/D OIL	GRAVITY DRY	CUT %	GAS MCF/D
2-56	P	29	801	28	30.1°	32.4	21
3-56	P	31	801	26		30.9	20
4-56	P	30	700	23		32.4	22
5-56	P	24	412	17	30.0°	33.7	17

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
5-31 to 6-1	11370' 11052'	T.D. Plug	Shell Electric Rig moved in and rigged up. Displaced oil with 80# lime-base mud. Removed tubing. Ran to top of liner with 6" casing scraper.
6-2			Straddle tested 7" casing from top of liner to surface using 2500 psi without loss.
6-3			Ran shoe squeeze tool to 10,560' and formation broke down at the rate of 16 cubic feet per minute with 1600 psi. With shoe squeeze tool at 10,560' cemented with 50 sacks Colton Hi-temp cement (118# slurry). Squeezed 93 cubic feet with no bleed back at 1800 psi. Located top of cement at 10,560'.
6-4 to 6-6			Milled 7" casing 9,000'/9,026' with Servco section mill dressed with Servcoloy knives. Scraped window in the interval 9,000'/9,026' with 9-7/8" Grant scraper.
6-7			Formation broke down at the rate of 10 cubic feet per minute with 1700 psi. With open drill pipe at 9,125' cemented with 75 sacks 122# slurry cement plus 20% sand. Pulled above cement and squeezed with 30 cubic feet; maximum pressure 2000 psi. Closed in 30 minutes and pressure dropped to 1800 psi. Bled off 12 cubic feet. Located top of cement at 8,860' and cleaned out to 8,970'. Shot four 1/2" holes at 8,950'.
			Ran W.S.O. test with Johnston Casing Tester. Packer: set at 8,885', tailpiece to 8,904', no cushion, 3/8" bean. Valve Open: one hour (10:20 P.M.) Blow: light for the duration of the one hour test.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
			11-3/4"	Cemented 1,010'
			7"	Cemented 10,699'
			5"	Liner 10,663'/11365'
			Perfs.:	10,698'/11,156' 11,188'/11,227' & 11,259'/11,365'

DRILL PIPE SIZES

E. B. Muehlberger
Engineer

SIGNED

A MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

REDRILLING REPORT
FOR PERIOD ENDING 8-28-56
DEEPENING

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956
SANTA PAULA, CALIFORNIA

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
6-7 (Cont.)			Recovery: net rise 369' (2.4 bbl.) gassy drilling fluid. Decision: test witnessed and approved by Division of Oil and Gas.
6-8 to 6-10	9008' Rd.	9125'	Cleaned out cement 8,970'/9,008'. Set whipstocks at 9,008' and 9,023'. Drilled 6" hole.
6-11	9125'	Rd.	With open drill pipe at 9,125' plugged with 75 sacks modified cement, 20% sand. Squeezed away 18 cubic feet. Maximum surface pressure was 2000 psi. Located top of cement at 8,884' and cleaned out to 9,008'.
6-12 to 7-25	9008'	Rd. 12325'	Set whipstock at 9,008' and drilled 5-7/8" hole. Changed to oil-base mud at 9,200'. Ran Lane Wells oil-base electric log at 12,325'. Spotted 48 bbls. liner fluid. Conditioned mud. Mud: 78/79# high pH lime mud while milling and redrilling to 9,125'. 76/78# high pH lime mud while redrilling to 9,200'. 70/77# oil-base mud while redrilling to 10,688'. 78/82# oil-base mud while redrilling to 12,325'.
7-26	12325'	Rd.	Hung 4-1/2" (wire-wrapped) and 5" liner at 12,320', top of Baash-Ross hanger at 8,928'. Perforations: 11,019'/12,055' and 12,169'/12,320' (total 1,187') with 3/8" round holes, 1" centers, 8 rows, 96 holes per foot. Liner Equipment: metal petal basket at 11,013' and four centralizers. Liner Detail: (from bottom up) 12,320'/12,169' (151') 4-1/2", 16.60#, Grade E, Stancliff wire-wrapped liner; 12,169'/12,055' (114') 4-1/2", drill pipe as liner, 10.60#, R-2, with tool joints attached, used; 12,055'/11,019' (1,036') 4-1/2", 16.60#, Grade E, Stancliff wire-wrapped; 11,019'/11,008' (11') combination metal petal basket and C.P. joint; 11,008'/9,825' (1,183') 5", 18#, N-80,

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES

E. B. Muehlberger Ed
Engineer SIGNED

A MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura (FIELD) | RE DRILLING REPORT | Edison 50 (SECTION OR LEASE)

Ventura (COUNTY) | FOR PERIOD ENDING 8-28-56 | Sec. 21, T.3N., R.23W. (TOWNSHIP OR RANCHO)

DEEPENING

DIVISION OF OIL AND GAS RECEIVED NOV 23 1956 SANTA PAULA, CALIFORNIA

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
7-26 (Cont.)	12325'	Rd.	extremeline, seamless, R-3, includes one combination joint on top, extruded box; 9,825'/8,932' (893') 5", 19.50#, used drill pipe as extruded 8 round modified thread liner, R-2; 8,932'/8,928' (4') Baash-Ross plain hanger. Cemented liner through perforations at 11,008' with 258 sacks one to one pozmix and Hi-temp cement (106# slurry). Pulled 100' above liner and backscuttled 3 sacks cement. Ran 6" bit to top of liner, encountering no cement. Splice broke down when tested from surface with 1200 psi.
7-27	12325'	Rd.	With shoe squeeze tool at 8,826' formation broke down at the rate of 20 cubic feet per minute with 2000 psi. With shoe squeeze tool at 8,826' cemented with 100 sacks Hi-temp cement (118# slurry). Squeezed away 85 sacks, leaving 15 sacks above the splice. Located top of cement at 8,836' and cleaned out to 8,928' with 6" bit. Cleaned out cement stringers 9,407'/9,507' and 10,795'/10,895', solid cement 10,895'/10,998' with 4-1/8" bit.
7-28	12325'	Rd.	Ran W.S.O. test on splice with Johnston Casing Tester. Packer: set at 8,895', tailpiece to 8,912', no cushion. Valve Open: one hour (1:30 P.M.) Blow: light for 2 minutes; weak to dead for 13 minutes; dead for the balance of the one hour test. Recovery: net rise 130' (1.0 bbls.) drilling fluid. Decision: test witnessed and approved by Division of Oil and Gas. Shot four 1/2" holes at 10,995'.
7-29	12325'	Rd.	Ran W.S.O. test with Johnston Casing Tester. Packer: set at 10,943', tailpiece to 10,959', no cushion. Valve Open: one hour (1:10 A.M.) Blow: medium to light for the duration of the one hour test. Recovery: net rise 8,286' (54 bbls.) oil, gas cut mud and water. Decision: test not approved.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES

E. B. Muehlberger Engineer

SIGNED

A MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

REDRILLING REPORT

FOR PERIOD ENDING 8-28-56

DEEPENING

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956
SANTA PAULA, CALIFORNIA

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
7-29 (Cont.)	12325'	Rd.	With shoe squeeze tool at 10,867' cemented with 30 sacks Hi-temp cement (118# slurry). Squeezed away 25 sacks leaving 5 sacks in liner. Maximum squeezing pressure was 3800 psi; final shut in pressure was 1000 psi. Cleaned out cement stringers 10,912'/10,950' and solid cement 10,950'/10,998'. Shot four 1/2" holes at 10,990'.
7-30	12325'	Rd.	Ran W.S.O. test with Johnston Casing Tester. Packer: set at 10,953', tailpiece to 10,969', no cushion, 3/8" bean. Valve Open: one hour (10:45 P.M.) Blow: weak decreasing to dead in 15 minutes; dead for the balance of the one hour test. Recovery: net rise 475' (1.0 bbl.) drilling fluid. Decision: test witnessed and approved by Division of Oil and Gas.
7-31	12325'	Rd.	Cleaned out cement 10,998'/11,008' and ran in to 12,320' with 3-5/8" bit. Spotted 60 bbls. liner fluid.
8-1	12325'	Rd.	Landed 2-1/2" tubing at 8,904' with 18° beveled flow shoe on bottom, Sargent pump shoe at 8,486'. Changed to circulating oil. **Work done by Shell Electric Rig**
8-2			Flowed to test tanks at 11:30 A.M., 100% cut (0.1% sediment), 875 gcg, through 32/64" bean, T.P. 100, C.P. 200 psi.
8-3			Flowed circulating oil at the rate of 417 B/D, 98% cut, pressures 100/390 psi.
8-4			Flowed circulating oil at the rate of 300 B/D, 99% cut (0.1% sediment), pressures 150/220 psi.
8-5			Flowed at the rate of 276 B/D, 98% cut, pressures 50/225 psi.
8-6 to 8-7			Shell Reconditioning Rig WR-1 moved in and rigged up. Killed well with 94# oil-base mud. Lowered tubing to 10,995' and circulated.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES

E. B. Meuel Sheegar Engineer

SIGNED

A MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

RE DRILLING REPORT

FOR PERIOD ENDING 8-28-56

DEEPENING

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956
SANTA PAULA, CALIFORNIA

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-8			Removed tubing. Straddle tested 7" casing 8,915'/0' using 2000 psi without loss.
8-9			Straddle tested 5" liner 8,929'/11,008' using 2000 psi without loss.
8-10 to 8-11			Hit soft fill at 11,350' and circulated down to 12,236' with 3-5/8" bit. Cleaned out soft fill (barites) 12,236'/12,320' with 3-5/8" bit. Shot four 1/2" jet holes at 12,210' and 12,075'.
8-12			With shoe squeeze tool at 12,179', plug catcher at 10,803', broke circulation and pumped in 17 cubic feet Hi-temp cement. Sheared plug. Maximum pressure was 3500 psi. Pulled to 12,055' and backscuttled.
8-13			Ran 3-5/8" bit to fill at 12,312' (no cement).
8-14			Ran Johnston tester but unable to set packer (D.S.T. #1).
8-15			Shot eight 1/2" holes at 12,190'. With shoe squeeze tool at 12,116' formation broke down at the rate of 6 cubic feet per minute with 3400#. With shoe squeeze tool at 12,116' cemented with 25 sacks Colton Hi-temp cement mixed with 11# R-2 retarder. Final pressure was 3900 psi. Backscuttled approximately 10 sacks cement.
8-16			Cleaned out hard fill 12,309'/12,320' with 3-5/8" bit. Found no cement cuttings.
8-17			Ran D.S.T. #2 on interval 12,149'/12,320' with Johnston Formation Tester. Packer: set at 12,149', tailpiece to 12,165', 3,510' mud cushion, 3/8" bean. Valve Open: four hours and 3 minutes (8:55 A.M.) preceded by 35 minute initial static test and followed by 64 minute final static test. Blow: faint to medium for 1/2 hour increasing to steady medium for 1-1/2 hours; gradually diminishing to faint for the balance of the four hour and 3 minute test. Pressures: ISIP 7500, IFP 3154, FFP 5814, FSIP 6668 psi.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES

E. B. Muehlberger
Engineer

SIGNED

4A MASTER SET 2-50 PRINTED IN U. S. A. 6-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

RE DRILLING REPORT
FOR PERIOD ENDING 8-28-56
DEEPENING

DIVISION OF OIL AND GAS
RECEIVED
NOV 28 1956
SANTA PAULA, CALIFORNIA

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-17 (Cont.)			Recovery: net rise 8,279' (48.02 bbls.) muddy, slightly oily water (898/933 gpg salinities). Shot eight jet holes in the interval 12,074'/12,076'.
8-18			Set Houston cast iron cement retainer at 12,065'. Broke down formation with shoe squeeze tool at the rate of 8 cubic feet per minute with 4700 psi. Pumped in 25 sacks Colton Hi-temp cement (120# slurry). Pressure dropped from 3800 to 0 psi. Released retainer. Cleaned out cement stringers in the interval 11,557'/11,787' and solid cement 11,787'/12,055'.
8-19 to 8-20	12325' Plug	Rd. 12055'	Spotted 25 bbls. liner fluid; displaced with 60 bbls. oil-base mud. Reperforated two 1/2" jet holes per foot in the intervals 12,005'/11,844' and 11,814'/11,785'. Ran back to bottom (12,055') with 3-5/8" bit.
8-21	12325' Plug	Rd. 12055'	Landed 2" and 2-7/8" tubing at 10,508'. Tubing Detail: (from bottom up) 10,508'/8,902' (1,606') 2" J-55, with beveled collars; 8,902'/0' (8,902') 2-7/8" upset tubing. Gas Lift Valves: @ 8,082' (1,200#), 7,060' (1,300#), 5,023' (1,400#) and 2,636' (1,500#). Flag nipples located one stand above each valve. Changed to circulating oil. Rig released.
8-22			Began flowing weakly to sump, 18% cut (12% sediment), 20/64" bean, pressures 100/150 psi.
8-23			Flowed to sump, 100% cut (1.0% sediment), pressures 0/200 psi.
8-24			Turned to test tanks flowing circulating oil at the rate of 90 B/D, 100% cut, pressures 100/200 psi.
8-25			Flowed circulating oil at the rate of 168 B/D, 80% cut (0.3% sediment), pressures 100/240 psi.
8-26			Flowed circulating oil at the rate of 166 B/D, 64% cut, pressures 90/1400 psi. Began gas lifting at 10:00 A.M. at the rate of 264 B/D, 42% cut (1.8% sediment), pressures 150/1400 psi.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES

E. B. Muehlberger
Engineer
SIGNED

3 4A MASTER SET 2-50 PRINTED IN U. S. A. 9-54

SHELL OIL COMPANY

WELL NO.

Ventura
(FIELD)
Ventura
(COUNTY)

RE DRILLING REPORT
FOR PERIOD ENDING
8-28-56
DEEPENING

Edison 50
(SECTION OR LEASE)
Sec. 21, T.3N., R.23W.
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	STATUS	HOURS PROD.	GROSS FLUID	CLEAN OIL	CUT %	BEAN 1/64"	T.P. psi	C.P. psi
8-27										
8-28			GL	16	168	50	70.0	32	60	1400
8-29			GL	24	337	61	82.0	32	75	1250
8-30			GL	24	358	72	80.0	32	100/500	1290
8-31			GL	24	384	77	80.0	32	100	1300
9-1			GL	24	332	53	84.0	32	300	1300
9-2			GL	24	348	42	88.0	32	75	1320
9-3			GL	24	340	34	90.0	32	500	1350

REMARKS

Gas lifted circulating oil at the rate of 322 B/D, 66% cut (0.5% sediment), 32/64" bean, pressures 125/1400 psi.

FINAL REPORT

Work done by Reconditioning Crews
W. C. George, Shell Foreman

DIVISION OF OIL AND GAS
RECEIVED
NOV 23 1956
SANTA PAULA, CALIFORNIA

END

CONDITION AT ~~BEGINNING~~ OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
RE	DRILLED		11-3/4"	Cemented 1,010'
			7"	Milled 9000'/9026'
5-7/8"	9008'	12325'	4-1/2 & 5"	Liner 8928'/12320'
			C.P.	11008' & 10995'
	Plug	12055'	Perfs.:	11019'/12055' & (12169'/12320')

DRILL PIPE SIZES


E. B. Muehlberger Jr.
Engineer
SIGNED

21-3-23

DIVISION OF OIL AND GAS
RECEIVED
AUG 9 1956
SANTA PAULA, CALIFORNIA

Location
1390.65' North & 1812.75' West
from R.C.L. Cor. 11.
Elevation 163.1'

1-586

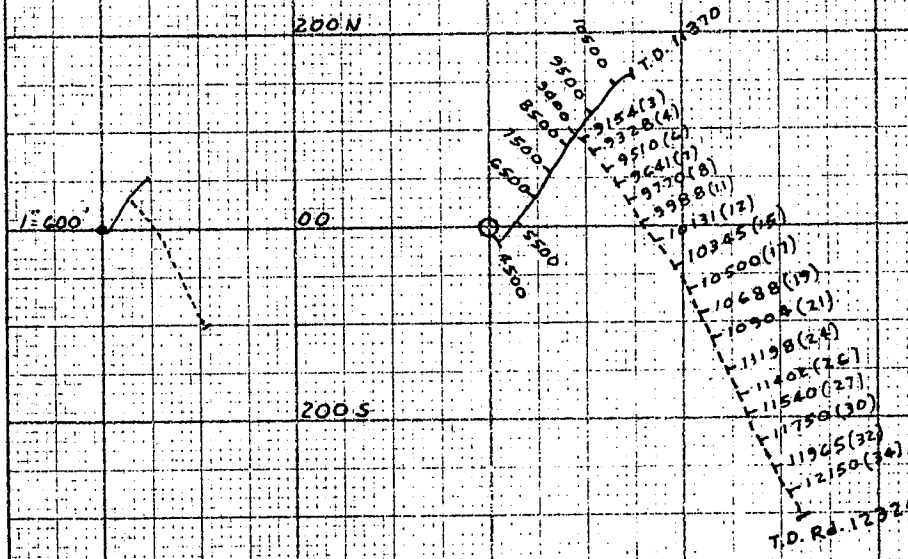

1-586

155.55' North & 149.04' East
from surface location
Measured Depth 11,370'
Vertical Depth 11,365.76'

REDRILL 1956

~~303.66' South & 320.26' East~~
~~from surface location~~
~~Measured Depth 12,325'~~
~~Vertical Depth 12,288.87'~~

SHELL OIL COMPANY
COASTAL DIVISION

SURVEY
VENTURA FIELD

EDISON 50

DRAFTING BY: V.E.S. APPROVED BY:	SCALE: 1" = 200' ISSUED: 7-25-56
PRODUCTION DEPARTMENT EXPLOITATION ENGINEERING	Z-6997

NO. 318V. 20 DIVISIONS PER INCH BOTH WAYS. 150 BY 200 DIVISIONS.
CODEX BOOK COMPANY, INC., NORWOOD, MASSACHUSETTS.
PRINTED IN U.S.A.

Z-6995

SHELL OIL CO.

DIVISION OF OIL AND GAS
RECEIVED
AUG 9 1956

WELL: EDISON 50rd. DATE: 6-14-56 SHEET: 1

	Measured Depth	Meas. Sta. Dist.	Angle	Cosine	Vertical Depth Course	Vertical Depth Total	Sine	Course Deviation	Azimuth	Bearing of Deviation	Cosine	Latitude North	Latitude South	Sine	Departure East	Departure West	Total Latitude North	Total Latitude South	Total Departure East	Total Departure West
	9000					8997 61														
	9015	16	1 20	9997	15 00	9012 51	0233	0 35		S 77 E	2250		0 08	9744	0 34		98 62		89 40	
	9020	5	2 00	9994	5 00	9017 51	0349	0 17		S 44 E	7193		0 12	6947	0 12		98 42		89 86	
	9024	4	1 55	9994	4 00	9021 51	0334 0344	0 13		S 40 E	7660		0 10	6428	0 08		98 32		89 94	
	9062	38	3 30	9981	37 93	9059 44	0610	2 32		S 27 E	8910		2 07	4540	1 05		96 25		90 99	
	9075 13	31	4 05	9975	30 92	9090 36	0712	2 21		S 37 E	7986		1 76	6018	1 33		94 49		92 32	
3	9154	61	4 35	9968	60 80	9151 16	0799	4 87		S 38 E	7880		3 84	6157	3 00		90 65		95 32	
	9204	50	5 20	9957	49 79	9200 95	0929	4 65		S 38 E	7880		3 66	6157	2 86		86 99		98 18	
	9260	56	7 00	9925	55 58	9256 53	1219	6 83		S 36 E	8090		5 53	5878	4 01		81 46		102 19	
4	9328	68	7	9925	67 49	9324 02	1219	8 29		S 38 E	7880		6 53	6157	5 10		74 93		107 29	
	9420	92	6 55	9927	91 33	9415 35	1204	11 08		S 37 E	7986		8 85	6018	6 67		66 08		113 96	
5	9454	34	7 10	9922	33 73	9449 08	1248	4 24		S 36 E	8090		3 43	5878	2 49		62 65		116 45	
	9484	30	7 00	9925	29 78	9478 86	1219	3 66		S 41 E	7547		2 76	6561	2 40		59 89		118 85	
6	9510	26	7 00	9925	25 81	9504 67	1219	3 17		S 39 44 E	7771		2 46	6293	1 99		57 43		120 84	
	9524	24	7 20	9918	23 80	9528 47	1276	3 06		S 37 E	7986		2 44	6018	1 84		54 99		122 68	
6	9560	26	7 30	9914	25 78	9554 25	1305	3 39		S 37 E	7986		2 71	6018	2 04		52 28		124 72	
	9593	33	7 45	9909	32 70	9586 95	1349	4 45		S 38 E	7880		3 51	6157	2 74		48 77		127 46	
7	9608	15	7 50	9907	14 86	9601 81	1363	2 04		S 37 E	7986		1 63	6018	1 23		47 14		128 69	
7	9641	33	8 00	9903	32 68	9634 49	1392	4 59		S 36 E	8090		3 71	5878	2 70		43 43		131 39	
	9669	28	7 45	9909	27 75	9662 24	1349	3 78		S 36 E	8090		3 06	5878	2 22		40 37		133 61	
8	9696	27	8 10	9899	26 73	9688 97	1421	3 84		S 35 E	8192		3 15	5736	2 20		37 22		135 81	
	9722	26	8 00	9903	25 75	9714 72	1392	3 62		S 37 E	7986		2 89	6018	2 18		34 33		137 99	

CALCULATED BY: WCL

Z-6995

SHELL OIL CO.

DIVISION OF OIL AND GAS
RECEIVED
DATE: 6-25-54
AUG 9 1955
SANTA PAULA, CALIFORNIA

WELL: EDISON 50rd

SHEET: 2

	Measured Depth	Meas. Sta. Dist.	Angle	Cosine	Vertical Depth Course	Vertical Depth Total	Sine	Course Deviation	Azimuth	Bearing of Deviation	Cosine	Latitude North	Latitude South	Sine	Departure East	Departure West	Total Latitude North	Total Latitude South	Total Departure East	Total Departure West
8	9770	48	8 00	9903	47 53	9762 25	1392	6 68		S 35 E	8192		5 47	5736	3 83		28 86		141 82	
	9825	55	8 00	9913	54 47	9816 72	1392	7 66		S 37 E	7984		6 12	6018	4 61		22 74		146 43	
9	9872	47	8 20	9894	46 50	9863 22	1449	6 81		S 35 E	8192		5 58	5736	3 91		17 16		150 34	
10	9914	42	8 30	9890	41 54	9904 76	1478	6 21		S 26 E	8988		5 58	4384	2 72		11 58		153 06	
	9988	74	9 05	9875	73 08	9977 84	1579	11 68		S 34 E	8290		9 68	5592	6 53		1 90		159 59	
11	10056	68	9 00	9877	67 16	10045 00	1564	10 64		S 33 E	8387		8 92	5446	5 79			7 02	165 38	
12	10131	75	8 50	9881	74 11	10119 11	1536	11 52		S 34 E	8090		9 32	5878	6 77			16 34	172 15	
13	10188	57	8 30	9890	56 37	10175 48	1478	8 42		S 36 E	8090		6 81	5878	4 95			23 15	177 10	
14	10265	77	8 40	9886	76 12	10251 60	1507	11 60		S 34 E	8290		9 62	5592	6 49			32 77	183 59	
15	10345	80	8 45	9884	79 07	10330 67	1521	12 17		S 35 E	8192		9 97	5736	6 98			42 74	190 57	
16	10435	90	9 45	9856	88 70	10419 37	1693	16 24		S 24 E	9135		13 92	4067	6 20			56 66	196 77	
16	10462	27	9 15	9870	26 65	10446 02	1607	4 34		S 30 E	8660		3 76	5000	2 17			60 82	198 94	
17	10500	38	9 30	9863	37 48	10483 50	1650	6 27		S 30 E	8660		5 43	5000	3 14			65 85	202 08	
17	10543	43	8 45	9884	42 50	10526 00	1521	6 54		S 27 E	8910		5 63	4540	2 97			71 68	205 05	
18	10582	39	8 45	9884	38 55	10564 55	1521	5 93		S 24 E	8988		5 33	4384	2 60			77 01	207 65	
18	10618	36	8 20	9903	35 65	10600 20	1392	5 01		S 24 E	8829		4 42	4695	2 35			81 43	210 00	
	10652	34	8 15	9897	33 65	10633 85	1435	4 88		S 28 E	8829		4 31	4695	2 29			85 74	212 29	
19	10688	36	7 45	9909	35 67	10669 52	1349	4 86		S 28 E	8829		4 29	4695	2 28			90 03	214 57	
	10718	30	7 30	9914	29 74	10699 26	1305	3 92		S 29 E	8746		3 43	4848	1 90			93 46	216 47	
	10783	65	8 15	9897	64 33	10763 59	1435	9 33		S 31 E	8572		8 00	5150	4 80			101 46	221 27	
20	10843	60	7 45	9909	59 45	10823 04	1349	8 09		S 28 E	8829		7 14	4695	3 80			108 60	225 07	
21	10904	61	8 15	9897	60 37	10883 41	1435	8 75		S 23 E	9205		8 05	3907	3 42			116 65	228 49	

CALCULATED BY: VCS

W.O.J.

Z-6995

DIVISION OF OIL AND GAS
RECEIVED
AUG 9 1956

SHELL OIL CO.

WELL: EDISON 50rd. DATE: 7-6-56 SHEET: 3

SANTA PAULA, CALIFORNIA

	Measured Depth	Meas. Sta. Dist.	Angle	Cosine	Vertical Depth Course	Vertical Depth Total	Sine	Course Deviation	Azimuth	Bearing of Deviation	Cosine	Latitude North	Latitude South	Sine	Departure East	Departure West	Total Latitude North	Total Latitude South	Total Departure East	Total Departure West
22	10964	60	8 00	9903	59 42	10992 83	1392	8 35		S 28 E	8829		7 37	4695	3 92			124 02	232 41	
	11006	42	7 50	9907	41 61	10984 44	1363	5 72		S 28 E	8829		5 05	4695	2 69			129 07	235 10	
23	11059	53	7 40	9911	52 53	11036 97	1334	7 07		S 24 E	9135		6 46	4067	2 88			135 53	237 98	
	11133	74	7 15	9920	73 41	11110 38	1262	9 34		S 24 E	9135		8 53	4067	3 80			144 06	241 78	
24	98	65	7 40	9911	64 42	11174 80	1334	8 67		S 24 E	9135		7 92	4067	3 53			151 98	245 31	
	11245	47	7 50	9907	46 56	11221 36	1363	6 41		S 21 E	9336		5 98	3584	2 30			157 96	247 61	
25	11292	47	8 10	9899	46 53	11267 89	1421	6 68		S 25 E	9063		6 05	4226	2 82			164 01	250 43	
	11332	40	7 40	9911	39 64	11307 53	1334	5 34		S 19 E	9455		5 05	3256	1 74			169 06	252 17	
26	11402	70	7 40	9911	69 38	11376 91	1334	9 34		S 31 E	8572		8 01	5150	4 81			177 07	256 98	
	11449	47	7 50	9907	46 56	11423 47	1363	6 41		S 22 E	9272		5 94	3746	2 40			183 01	259 38	
26	11494	45	7 50	9907	44 58	11468 05	1363	6 13		S 20 E	9397		5 76	3420	2 10			188 77	261 48	
27	11540	46	8 30	9890	45 49	11513 54	1478	6 80		S 21 E	9336		6 35	3584	2 44			195 12	263 92	
	11631	91	9 00	9877	89 88	11603 42	1564	14 23		S 17 E	9563		13 61	2924	4 16			208 73	268 08	
28	57	26	8 30	9890	25 71	11629 13	1478	3 84		S 24 E	9135		3 51	4067	1 56			212 24	269 64	
	11710	53	9 00	9877	52 35	11681 48	1564	8 29		S 30 E	8660		7 18	5000	4 15			219 42	273 79	
30	11750	40	9 10	9872	39 49	11720 97	1593	6 37		S 20 E	9397		5 99	3420	2 18			225 41	275 97	
	11794	44	9 05	9875	43 45	11764 42	1579	6 95		S 24 E	9135		6 35	4067	2 83			231 76	278 80	
31	11832	38	9 00	9877	37 53	11801 95	1564	5 94		S 28 E	8829		5 24	4695	2 79			237 00	281 59	
31	11858	26	9 00	9877	25 68	11827 63	1564	4 07		S 25 E	9063		3 69	4226	1 72			240 69	283 31	
31	11895	37	9 05	9875	36 54	11864 17	1579	5 84		S 33 E	8387		4 90	5446	3 18			245 59	286 49	
	11932	37	9 05	9875	36 54	11900 71	1579	5 84		S 26 E	8988		5 25	4384	2 56			250 84	289 05	
32	11965	33	9 10	9872	32 58	11933 29	1593	5 26		S 34 E	8290		4 36	5592	2 94			255 20	291 99	

CALCULATED BY: VES

W.O.J.

Z-6995

SHELL OIL CO.

WELL: EDISON 50rd. DATE: 7-19-56 SHEET: 4

Measured Depth	Meas. Sta. Dist.	Angle	Cosine	Vertical Depth Course	Vertical Depth Total	Sine	Course Deviation	Azimuth	Bearing Of Deviation	Cosine	Latitude North	Latitude South	Sine	Departure East	Departure West	Total Latitude North	Total Latitude South	Total Departure East	Total Departure West
12012	47	9°	9877	46 42	11979 71	1564	7 35		S 36 E	8090		5 95	5878	4 32			261 15	296 31	
12054	42	8 50	9881	41 50	12021 21	1536	6 45		S 27 E	8910		5 75	4540	2 93			266 90	299 24	
12150	96	9°	9877	94 82	12116 03	1564	15 01		S 33 E	8387		12 59	5446	8 17			279 49	307 41	
12266	116	9°	9877	114 57	12230 60	1564	18 14		S 28 E	8829		16 02	4695	8 52			295 51	315 93	
1 25	59	9°	9877	58 27	12288 87	1564	9 23		S 28 E	8829		8 15	4695	4 33			303 66	320 26	

DIVISION OF OIL AND GAS
RECEIVED
AUG 9 1956
SANTA PAULA, CALIFORNIA

CALCULATED BY: VES

W.O.J.

FORM 109-A

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Report on Test of Water Shut-off

(FORMATION TESTER)

No. T 256-279

Mr. J M Fillman
P O Box 691
Ventura California

Santa Paula Calif.
July 31 19 56

Agent for Shell Oil Company

DEAR SIR:

Your well No. "Edison" 50, Sec. 21, T. 3N, R. 23W, S.B. B & M.
Ventura Field, in Ventura County, was tested for water shut-off
on July 31 19 56 Mr. G. J. Borkovich, designated by the supervisor was present
from 4:15 a.m. to 5:00 a.m. as prescribed by law; there were also present E. A. Ritzman, foreman;
E. Bruton, driller

Shut-off data: 5 in. 18 lb. casing was re cemented through holes at 10,995 ft.
on July 29, 19 56 in 5 7/8 in. hole with 30 ~~sacks~~ sacks of cement
under a pressure of 3500 psi. calculated to fill behind casing to — ft. below surface.
Casing record of well: 11 3/4" cem. 1010'; 7" cem. 10,699'. milled through 9000'-9026', recemented at 9000, four holes 8950', W.S.O.; 5" and 4 1/2" ld. 8927' - 12,320', c.p. 11,008 and 10,995', perf. 11,019' - 12,320, four holes 10,990', W.S.O. Junk: T.D. (1st hole) 11,365'
Present depth 12,325 ft. cmt. bridge 11,008 ft. to 10,998 ft. Cleaned out cmt. 10,950 ft. to 10,998 ft. for test.
A pressure of — lb. was applied to the inside of casing for — min. without loss after cleaning out to — ft.
A Johnston tester was run into the hole on 2 7/8 in. drill pipe ~~tubing~~
with ~~mud~~ ft. of water-mud cushion, and packer set at 10,953 ft. with tailpiece to 10,969 ft.
Tester valve, with 3/8 in. bean, was opened at 10:45 p.m. on July 30 and remained
open for 1 hr. and — min. During this interval there was a weak blow for 15 minutes, then
no blow thereafter.

Mr. Ritzman reported:

1. The 5" casing was perforated with four 1/2" holes at 10,995' and the test was wet.
2. The 5" casing was recemented as noted above.
3. The 5" casing was perforated with four, 1/2" holes at 10,990'.
4. A Johnston tester was run as noted above.

The Engineer noted:

1. When the drill pipe was removed 475' of drilling fluid was in the drill pipe above the tester, equivalent to 1.9 bbl.
2. The recording pressure bomb charts showed that the tester valve was open 1 hr.

THE SHUT-OFF AT 10,990' IS APPROVED.

Bottom hole coordinates 156'N & 149'E from the surface location.

redrill Bottom hole coordinates 304'S & 320'E from the surface location.

CC Prod Dept

k

E. H. MUSSER
State Oil and Gas Supervisor

By S A Rock Deputy

12367 2-55 21,400 SPO

FORM 109-D

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Special Report on Operations Witnessed

No. T 256-277

Mr. J M Fillman
P O Box 691
Ventura California
Agent for Shell Oil Company

Santa Paula, Calif.
July 31, 19 56

DEAR SIR:

Operations at your well No. "Edison" 50 Sec. 21, T. 3N, R. 23W, S.B. B. & M., Ventura Field, in Ventura County, were witnessed on July 28, 19 56. Mr. C. H. Schultz, representative of the supervisor was present from 6:50 p.m. to 7:40 p.m. There were also present E. A. Ritzman, drilling foreman and George Hoopengarner, driller.

Present condition of well: 11 3/4" cem. 1010'; 7" cem. 10,699', milled through 9,000'-9,026' recemented at 9000'; four holes 8950' W.S.O.; 5" & 4 1/2" ld. 8927'-12,320', c.p. 11,008', perf. 11,019'-12,320'. T.D. 12,325'. Plugged with cement 11,008'-10,998'. Junk: T.D. (1st hole) 11,365'.

The operations were performed for the purpose of demonstrating that no fluid has access to the well between the 7" and 5" and 4 1/2" casings.

Mr. Ritzman reported:

1. Cement was drilled out of the 7" casing from 8970' to 9000'.
2. A 5 7/8" hole was drilled from 9000' to 12,325' (total depth).
3. On July 26, 1956, 3393' of 5" and 4 1/2", 16.6 lb. and 19.6 lb. casing, including perforations from 11,019' to 12,320', was landed from 8927' to 12,320' and was cemented through a cementing device at 11,008' with 500 sacks of cement, calculated to fill behind the casing to 8927' below the surface.
4. On July 27, 1956, with a cement retainer set at 8830', 80 sacks of cement was forced below the retainer at a final pressure of 3000 Psi.
5. Cement was drilled out of the 7" casing from 8836' to 8927', equivalent to 18 sacks.
6. A Johnston tester was run into the hole on 3 1/2" drill pipe and packer set at 8895' with tailpiece to 8912'.
7. The tester valve was open at 1:30 p.m. and remained open for 1 hr. During this interval there was a light blow for 2 min., faint blow for 13 min., and no blow thereafter.

The Engineer noted:

1. When the drill pipe was removed, 130' of heavy drilling fluid was found in the drill pipe above the tester, equivalent to 1.0 bbl.
2. The recording pressure bomb charts indicated the tester functioned properly.

The test indicates that no fluid has access to the well between the 7", 5" and 4 1/2" casings.

THE CEMENTING OPERATIONS AS REPORTED AND WITNESSED ARE APPROVED.

CC B P Eastin
U

E. H. MUSSER
State Oil and Gas Supervisor

By S A Rock Deputy

12362 2-55 18,100 ② SPO

FORM 109-A

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Report on Test of Water Shut-off
(FORMATION TESTER)

No. T 256-212

Mr. J M Fillman
P O Box 691
Ventura California
Agent for Shell Oil Company

Santa Paula Calif.
June 11 19 56

DEAR SIR:

Your well No. "Edison" 50, Sec. 21, T. 3N, R. 23W, S.B. B & M.
Ventura Field, in Ventura County, was tested for water shut-off
on June 8, 19 56. Mr. G. J. Borkovich, designated by the supervisor was present
from 2:00 a.m. to 3:10 a.m. as prescribed by law; there were also present J. R. Urtasun, drilling foreman; H. Lemons, driller

Shut-off data: 7 in. 26 - 35 lb. casing was re cemented at the window at 9,000 ft.
on June 7, 19 56 in 9 7/8 in. hole with 75 ~~cu. ft.~~ sacks of cement
plus 20 per cent sand calculated to fill behind casing to — ft. below surface.
Casing record of well: 11 3/4" cem. 1010'; 7" cem. 10,699', milled through 9000'-9026', recemented at 9000', four holes 8950'; W.S.O.; 5" ld. 10,663' - 11,365', perf. (at intervals) 10,698' - 11,365'. Plug at 11,052', plugged with 50 sacks of cement below 10,560'
Present depth 11,370 ft. cmt. bridge 9125'± ft. to 8970 ft. Cleaned out cmt. 8860 ft. to 8970 ft. for test.
A pressure of — lb. was applied to the inside of casing for — min. without loss after cleaning out to — ft.
A Johnston gun and tester was run into the hole on 3 1/2 in. drill pipe ~~tubing~~,
with — ft. of water-mud cushion, and packer set at 8885 ft. with tailpiece to 8904 ft.
Tester valve, with 3/8 in. bean, was opened at 10:20 p.m. on June 7 and remained
open for 1 hr. and — min. During this interval there was a light blow throughout the test.

Mr. Urtasun reported:

1. June 3, 1956, with a cement retainer set at 10,563', 50 sacks of cement was forced away at 1800 Psi.
2. The top of the cement was located at 10,560'.
3. The 7" casing was milled from 9,000' to 9,026', and this hole was underreamed to 9 7/8".
4. On June 7, 75 sacks of cement plus 20 per cent sand was pumped through 3 1/2" drill pipe hanging at 9125'. The drill pipe was pulled up and 2000 Psi. pressure was applied from the surface.
5. Cement was drilled out of the 7" casing from 8860' to 8970', equivalent to 20 sacks.
6. The 7" casing was perforated with four, 1/2" holes at 8950'.
7. A Johnston gun and tester was run as noted above.

The Engineer noted:

1. When the drill pipe was removed 369' of gassy drilling fluid was in the drill pipe above the tester, equivalent to 2.4 bbl.
2. The recording pressure bomb charts showed that the tester valve was open 1 hr.

THE SHUT-OFF AT 8950' IS APPROVED.

k

CC Prod Dept

E. H. MUSSER
State Oil and Gas Supervisor

By S. A. Rook Deputy

12367 2-55 21,400 SPO

FORM 111 (1-49)

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

REPORT ON PROPOSED OPERATIONS

No. P 256-228

Mr. J M Fillman
P O Box 691
Ventura California
Agent for Shell Oil Company

Santa Paula Calif.
June 7 19 56

DEAR SIR:

Your proposal to deepen Well No. "Edison" 50,

Section 21, T. 3N, R. 23W S.B. B. & M., Ventura Field, Ventura County,

dated June 5 19 56, received June 7 19 56, has been examined in conjunction with records filed in this office.

Present conditions as shown by the records and the proposal are as follows:

RECORDS:
This Divison has no record of the re-perforating work done 10,720' to 10,830' and 11,000' to 11,040'.

THE NOTICE STATES:
"The present condition of the well is as follows:
1. Total depth. 11,370' Plug 11,052'
2. Complete casing record.
   11-3/4" cemented 1010'
   7" cemented 10,699' W.S.O.
   5" liner hung 10663/11365'
   Perforations: 10698/11156', 11188/11227', 11259/11365' (15 mesh, 1-1/2" slots).
   Jet Perfs., two 3/8" holes per foot: 10720/10830', 11000/11040'.
3. Last produced. April, 1956 (Date) 23 B/D (Net Oil) 30.1° (Gravity) 32.4% (Cut)."

PROPOSAL:
"The proposed work is as follows:
1. Pull tubing and clean out to top of liner.
2. Set shoe squeeze tool at 10650'± and squeeze 50 sacks Hi-Temp cement. Test casing and cement holes if required.
3. Mill window in 7" casing from 9000/9020'± . Place cement from 8950' to 9050' and squeeze with 2000 psi.
4. Clean out to 8970'±, shoot 4 holes at 8950'± and make a W.S.O. test. D.O.G. to witness.
5. Clean out cement to 9010'±; set whipstock.
6. Redrill and deepen 6" hole to 12250'±.
7. Hang 4-1/2" and 5" combination liner 8900/12245'±, from 11030/12245'± to be 4-1/2" wire wrapped.
8. Cement through perforations at 11,020'± and test splice. Clean out to 11,010'± and shoot four 1/2" holes and make W.S.O. test. Both tests are to be witnessed by D.O.G. Clean out to bottom of liner.
9. Hang 2-7/8" tubing at 8890'± and put well on production pumping."

E. H. MUSSER, State Oil and Gas Supervisor

By Continued, Deputy

11210 1-55 30M SPO

FORM 111-X. 16332 10-49 3750 SPO

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Report on Proposed Operations

No. P 256-228

Page 2

Shell Oil Company

Well No. "Edison" 50, Section 21, T. 3N, R. 23W S.B. B. & M.,

DECISION:
THE PROPOSAL IS APPROVED PROVIDED THAT:

1. The hole is, at all times, kept full of drilling fluid of proper weight and quality to prevent blowouts.
2. Adequate blowout prevention equipment shall be installed and maintained ready for use at all times.
3. Any hole penetrating an oil or gas zone, to be sidetracked, shall be plugged with cement insofar as possible.

Blanket Bond.

GVB/k

CC Prod Dept

E. H. MUSSER
[redacted]
State Oil and Gas Supervisor

By S. A. Rook Deputy

FORM 107.

DIVISION OF OIL AND GAS
RECEIVED
JUN 7 1956
SANTA PAULA, CALIFORNIA

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Notice of Intention to Deepen, Redrill, Plug or Alter Casing in Well

This notice must be given before work begins; one copy only

Ventura Calif. June 5, 19 56

DIVISION OF OIL AND GAS

Santa Paula, Calif.

In compliance with Section 3203, Chapter 93, Statutes of 1939, notice is hereby given that it is our intention to commence the work of deepening, ~~redrilling, plugging or altering casing~~ at Well No. Edison 50
(Cross out unnecessary words)

, Sec. 21, T. 3 N., R. 23 W., S.B. B. & M.

Ventura Field, Ventura County.

The present condition of the well is as follows:

1. Total depth.
   11,370' Plug 11,052' ✓

2. Complete casing record.
   11-3/4" cemented 1010' ✓
   7" cemented 10,699' W.S.O. ✓
   5" liner hung 10663/11365' ✓
   Perforations: 10698/11156', 11188/11227', 11259/11365' ✓ (15 mesh, 1-1/2" slots).
   Jet Perfs., two 3/8" holes per foot: 10720/10830', 11000/11040'.

no record of this Re-perf.

MAP	MAP BOOK	CARDS	BOND	FORMS 114	FORMS 121
			Blanket	✓	✓

3. Last produced. April, 1956 (Date) | 23 B/D (Net Oil) | 30.1° (Gravity) | 32.4% (Cut)

The proposed work is as follows:

1. Pull tubing and clean out to top of liner.
2. Set shoe squeeze tool at 10650'± and squeeze 50 sacks Hi-Temp cement. Test casing and cement holes if required.
3. Mill window in 7" casing from 9000/9020'±. Place cement from 8950' to 9050' and squeeze with 2000 psi.
4. Clean out to 8970'±, shoot 4 holes @ 8950'± and make a W.S.O. test. D.O.G. to witness.
5. Clean out cement to 9010'±; set whipstock.
6. Redrill and deepen 6" hole to 12250'±.

(Over)

Shell Oil Company
(Name of Operator)

By [signature]

ADDRESS ONE COPY OF NOTICE TO DIVISION OF OIL AND GAS IN DISTRICT WHERE WELL IS LOCATED

DOG

SHELL OIL COMPANY
INCORPORATED
SAN FRANCISCO, CALIFORNIA

Date October 18, 1949

No. 565

WELL COMPLETION REPORT

NAME and/or No. Edison 50

Company Shell Oil Company

Field Ventura

Spudding Date 7-29-49

Completion Date 10-10-49

Elevation 163.1'

Total Depth 11,370

Plugged Back Depth

Location 1390.6' north and 1812.75' west from N.C.L. Corner Sec. 11, Sec. 21, T. 3N., R. 23W.

Interval Produced 10,698' - 11,365'

11-3/4	" casing	cemented at	1010 '
7"	" casing	cemented at	10,699 '
	" casing 1.50	cemented at	10,631 '
	" casing	landed/hung at	'
	" casing	cemented thru perfs. at	'
5	" liner	landed/hung at	11,365 '
5	"	top at	10,663 '
2-1/2	" tubing	hung at	10,539 '

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

Perforations: 603' in 5" liner
10,698' - 11,159'
11,188' - 11,227'
11,259' - 11,365'
(15 mesh, 1-1/2" slots, 3 rows, 4" centers, clusters of four)

Production Data	First Full 24 Hrs.	Addtl. Prod. Data	Calculated Potential
Date	10-11-49	10-10-49	
Manner of Producing	Flowing	Flowing	
Gross Fluid---B/D	736	718	
Clean Oil---B/D	722	696	
Cut---%	2.1	3.1	
Gravity---°A.P.I. (Dry/Wet)			
Free Water---B/D			
Salt in Water---Grs./U.S. Gal.			
Gas---M.C.F.		554	
Gas Oil Ratio			
Gasoline---Gallons/M.C.F.			
Size Orifice Tubing	13/64"	13/64"	
Size Orifice Casing			
Pressures Tubing	2000/2250 #	1900#	
Pressures Casing	1500#	1350#	

Remarks:

Division Exploitation Engineer J. L. Arthur

Division Superintendent J. L. Arthur for JDK

Div. Ad & Pro.

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING

July 31, 1949

WELL NO. Edison 50
(SECTION OR LEASE)

Ventura
(FIELD)

Ventura
(COUNTY)

Sec. 21, T.3N, R-23W
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
			Location: 1390.65' north and 1812.75' west from R.C.L. Corner No. 11
			Elevation: 163.1' (Derrick Floor) 151.2' (Ground Mat) 11.9 (Difference)
			All measurements taken from derrick floor.
7-29	0	55	Spudded in at 6:00 p.m. Drilled 17" hole. Mud 79#, water-base.
30	55	454	Drilled 17" hole. Mud 78/79#, water-base.
31	454	1010	Drilled 17" hole. Mud 77/79#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET

DRILL PIPE SIZES 5-9/16"

DRILLERS

Martin, P.
Bigler, W.H.
Lyon, W.C.
Alberts, R.

J. L. Arthur
SIGNED

4A MASTER SET 1500 8-48 PRINTED IN U. S. A.

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING August 7, 1949

WELL NO.

Ventura (FIELD)

Ventura (COUNTY)

Edison 50 (SECTION OR LEASE)

Sec. 21, T.3N., R.23W (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-1	1010		Cemented 11-3/4" casing at 1010' Cement: 1000 sacks of construction, last 300 sacks treated (114/118# slurry) Displacement: 660 cu.ft. of mud Casing detail: all 47#, J-55, R.3, L.T. & C., Pittsburgh Flanged up.
2	1010	1227	Tested casing with 800# without loss. Drilled 10-5/8" hole. Mud 75/78#, water-base.
3	1227	1570	Drilled 10-5/8" hole. Mud 78/81#, water-base.
4	1570	2307	Drilled 10-5/8" hole. Mud 78/80#, water-base.
5	2307	2913	Drilled 10-5/8" hole. Mud 78/81#, water-base.
6	2913	3337	Drilled 10-5/8" hole. Mud 78/80#, water-base.
7	3337	3733	Drilled 10-5/8" hole. Mud 78/80#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010		

DRILL PIPE SIZES 4½"

DRILLERS
Martin, P.
Bigler, W.H.
Lyon, W.C.
Alberts, R.
Keeler, W.M.

SIGNED

D 4A MASTER SET 1950 9-49 PRINTED IN U. S. A.

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING

August 14, 1949

WELL NO.

Edison 50
(SECTION OR LEASE)

Sec. 21, T3N, R23W
(TOWNSHIP OR RANCHO)

Ventura
(FIELD)

Ventura
(COUNTY)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-8	3733	4090	Drilled 10-5/8" hole. Mud 79/80#, water-base.
9	4090	4395	Drilled 10-5/8" hole. Mud 79/81#, water-base.
10	4395	4806	Drilled 10-5/8" hole. Mud 78/81#, water-base.
11	4806	5199	Drilled 10-5/8" hole. Mud 79/81#, water-base.
12	5199	5573	Drilled 10-5/8" hole. Mud 77/80#, water-base.
13	5573	5701	Drilled 9-7/8" hole. Mud 77/78#, water-base.
14	5701	5960	Drilled 9-7/8" hole. Mud 77/79#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

DRILLERS

Martin, P.
Bigler, W. H.
Lyon, W. C.
Alberts, R.
Keeler, W.

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010'	11-3/4"	cemented 1010'
10-5/8"	1010	3733'		

DRILL PIPE SIZES 4-1/2"

SIGNED

5-44 MASTER SET 1500 9-48 PRINTED IN U. S. A.

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING August 21, 1949

WELL NO. Edison 50
(SECTION OR LEASE) Sec. 21, T 3N R23W
(TOWNSHIP OR RANCHO)

Ventura
(FIELD)
Ventura
(COUNTY)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-15	5960	6155	Drilled 9-7/8" hole. Mud 78/80#, water base.
8-16	6155	6355	Drilled 9-7/8" hole. Mud 78/81#, water base.
17	6355	6513	Drilled 9-7/8" hole. Mud 78/82#, water-base.
18	6513	6618	Drilled 9-7/8" hole. Mud 81/82#, water base.
19	6618	6787	Drilled 9-7/8" hole. Mud 77/82#, water base.
20	6787	6935	Drilled 9-7/8" hole. Mud 79/82#, water base.
21	6935	7114	Drilled 9-7/8" hole. Mud 79/82#, water base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010	11-3/4"	cemented 1010'
10-5/8"	1010	5573		
9-7/8"	5573	5960		

DRILL PIPE SIZES 4-1/2"

DRILLERS

Alberts, R.
Martin, P.
Lyon, W.C.
Bigler, W.H.

SIGNED

4A MASTER SET 1500 8-48 PRINTED IN U. S. A.

SHELL OIL COMPANY
INCORPORATED

WELL NO.

DRILLING REPORT
FOR PERIOD ENDING

Ventura (FIELD)
Ventura (COUNTY)
August 28, 1949
Edison 50 (SECTION OR LEASE)
Sec. 21, T. 3 N., R. 23 W. (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-22	7114	7339	Drilled 9-7/8" hole. Mud 79/81#, water-base.
23	7339	7528	Drilled 9-7/8# hole. Mud 79/813#. water-base.
24	7528	7604	Drilled 9-7/8" hole. Mud 80/83#. water-base.
25	7604	7752	Drilled 9-7/8" hole. Mud 79/81#, water-base.
26	7752	7937	Drilled 9-7/8" hole. Mud 80/81#. water-base.
27	7937	7962	Drilled 9-7/8" hole. Mud 80/81#, water-base. Twisted off, leaving 2 drill collars and bit in hole. Recovered fish with Bowen socket after spotting 50 barrels of oil.
28	7962	8101	Drilled 9-7/8" hole. Mud 79/81#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010	11-3/4"	Cemented 1010'
10-5/8"	1010	5513		
9-7/8"	5573	7114		

DRILL PIPE SIZES 4-1/2"

DRILLERS
Lyon, W. C.
Alberts, E.
Keeler, W. M.
Bigler, W. H.

SIGNED

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING

September 4, 1949

WELL NO.

Ventura
(FIELD)

Ventura
(COUNTY)

Edison 50
(SECTION OR LEASE)

Sec. 21, T3N, R23W
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
8-29	8101	8255	Drilled 9-7/8" hole. Mud 79/81#, water-base.
30	8255	8365	Drilled 9-7/8" hole. Mud 79/82#, water-base. Pulled, leaving half of cross section from bit in hole. Ran Globe junk basket and recovered fish.
31	8365	8440	Drilled 9-7/8" hole. Mud 79/81#, water-base. Lost gauge cutter from bit. Recovered fish with Globe junk basket.
9-1	8440	8573	Drilled 9-7/8" hole. Mud 80/82#, water-base.
2	8573	8660	Drilled 9-7/8" hole. Mud 80/82#, water-base.
3	8660	8817	Drilled 9-7/8" hole. Mud 79/80#, water-base.
4	8817	8971	Drilled 9-7/8" hole. Mud 78/79#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010'	11-3/4"	cemented 1010'
10-5/8"	1010	5573		
9-7/8"	5573	8101		

DRILL PIPE SIZES 4-1/2"

DRILLERS

Lyon, W. C.
Alberts, R.
Keeler, W. M.
Bigler, W. H.

SIGNED

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING

September 11, 1949

WELL NO. Edison 50
(SECTION OR LEASE)

Ventura
(FIELD)

Ventura
(COUNTY)

Sec. 21, T3N, R23W
(TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
9-5	8971	9063	Drilled 9-7/8" hole. Mud 77/83#, water-base.
6	9063	9156	Drilled 9-7/8" hole. Mud 78/81#, water-base.
7	9156	9284	Drilled 9-7/8" hole. Mud 79/81#, water-base.
8	9284	9402	Drilled 9-7/8" hole. Mud 78/80#, water-base.
9	9402	9527	Drilled 9-7/8" hole. Mud 78/82#, water-base.
10	9527	9631	Drilled 9-7/8" hole. Mud 78/82#, water-base.
11	9631	9728	Drilled 9-7/8" hole. Mud 78/80#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010'	11-3/4"	cemented 1010'
10-5/8"	1010	5573		
9-7/8"	5573	8971		

DRILL PIPE SIZES 4-1/2"

DRILLERS

Lyon, W. C.
Alberts, R.
Keeler, W. M.
Bigler, W. H.

J. T. Carthew
SIGNED

Div. Oil & Gas

SHELL OIL COMPANY
INCORPORATED

WELL NO.

DRILLING REPORT
FOR PERIOD ENDING

Ventura (FIELD)

Ventura (COUNTY)

September 18, 1949

Edison 50 (SECTION OR LEASE)

Sec. 21, T.3N., R.23W. (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
9-12	9728	9860	Drilled 9-7/8" hole. Mud 78/80#, water-base.
13	9860	9980	Drilled 9-7/8" hole. Mud 78/82#, water-base.
14	9980	10045	Drilled 9-7/8" hole. Mud 78/82#, water-base.
15	10045	10164	Drilled 9-7/8" hole. Mud 78/80#, water-base.
16	10164	10294	Drilled 9-7/8" hole. Mud 77/80#, water-base.
17	10294	10418	Drilled 9-7/8" hole. Mud 77/79#, water-base.
18	10418	10467	Drilled 9-7/8" hole. Mud 76/78#, water-base.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010	11-3/4"	cemented 1010'
10-5/8"	1010	5573		
9-7/8"	5573	9728		

DRILL PIPE SIZES 4-1/2"

DRILLERS
Lyon, W. C.
Alberts, R.
Keeler, W. M.
Bigler, W. H.

SIGNED

SA MASTER SET 1500 3-48 PRINTED IN U.S.A.

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING September 25, 1949

WELL NO.

Ventura (FIELD)
Ventura (COUNTY)
Edison 50 (SECTION OR LEASE)
Sec. 21, T.3N, R.23W (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
9-19	10467	10560	Drilled 9-7/8" hole. Mud 79/83#, water-base.
20	10560	10656	Drilled 9-7/8" hole. Mud 80/82#, water-base.
21	10656	10700	Drilled 9-7/8" hole. Mud 79/80#, water-base. Ran Schlumberger electric at 10700'. Magnetic survey instrument stopped at 5500'. Ran 9-7/8" bit, circulating and conditioning mud.
22	10700		Ran magnetic survey. Circulated and conditioned mud. Mud 76/81#, water-base.
23			Cemented 7" casing at 10699'. Cement: 1475 of Colton construction cement(85# slurry) mixed with 225 sack of gel followed by 200 sacks of Hi-Temp (120# slurry). Casing equipment: regular Baker down whirler float shoe and collar with scratchers at 9980/10030', 8575/8610, 7490/7625, 6455/6495, 5545/5600, 4080/4170 and 2410/2470; two centralizers on either side of scratchers. Displacement: 2231 cu.ft. of mud. Cement returns. Final pressure: 1800#. Pressure test: 2500# for 10 minutes without loss. Casing detail (from bottom up) 365' of 35#, N.80, extremeline, R.3, Spang 2725' of 32#, N.80, extremeline, R.3, Spang 3507' of 29#, N.80, extremeline, R.3, Spang 4067' of 26#, N.80, extremeline, R.3, Spang 5' of 35#, N.80, extremeline, R.3, Spang Ran Eastman temperature survey.
24			Flanged up. Standing cemented.
25			Standing cemented.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010'	11-3/4"	cemented 1010'
10-5/8"	1010	5573		
9-7/8"	5573	10467		

DRILL PIPE SIZES 4-1/2"

DRILLERS
Lyon, W.C.
Alberts, R.
Keeler, W.M.
Bigler, W. H.
Martin, P.

SIGNED

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING October 2, 1949

WELL NO. ____

Ventura (FIELD) / Ventura (COUNTY)

Edison 50 (SECTION OR LEASE) / Sec. 21, T.3N, R.23W (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
9-26	10700		Standing cemented.
27	10700	10704	Located baffle at 10654'. Tested casing: 1500# without loss. Cleaned out to bottom, checking shoe at 10699'. Drilled 5-7/8" hole to 10704'. Circulated and conditioned mud. Mud 73/76#, water-base.
28	10704		W.S.O. Test (Johnston Casing Tester) Packer: at 10631', tailpiece to 10647', 3/8" bean, 1680' of water cushion. Valve open: 1 hour. Blow: medium steady increasing to strong at end of test, gas to surface in 40 minutes. Recovery: 825' of thick, gassy oil mud and oil. Decision: test witnessed and approved by Division of Oil and Gas. Packed off 25 minutes because of gas while running in. Mud 76/77#, water-base.
29	10704	10764	Changed to oil-base mud. Drilled 5-7/8" hole. Mud 86/87#, oil-base.
30	10764	10897	Drilled 5-7/8" hole. Mud 84/86#, oil-base.
10-1	10897	10970	Drilled 5-7/8" hole. Mud 85/86#, oil-base.
2	10970	11042	Drilled 5-7/8" hole. Mud 84/86#, oil-base. Packed off 15 minutes because of gas.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0	1010	11-3/4"	cemented 1010'
10-5/8"	1010	5573	7"	cemented 10699'
9-7/8"	5573	10700		

DRILL PIPE SIZES 3-1/2"

DRILLERS
Lyon, W. C.
Alberts, R.
Migler, W. H.
Martin, P.

SIGNED

SHELL OIL COMPANY
INCORPORATED

DRILLING REPORT
FOR PERIOD ENDING October 9, 1949

WELL NO. Edison 50 (SECTION OR LEASE)

Ventura (FIELD)

Ventura (COUNTY)

Sec. 21, T.3N, R.23W (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
10-3	11042	11127	Drilled 5-7/8" hole. Mud 82/93#, oil-base. Packed off 15 minutes due to gas. Added Barite and Eclipse Talc.
4	11127	11174	Drilled 5-7/8" hole. Mud 90/93#, oil-base.
5	11174	11260	Drilled 5-7/8" hole. Mud 91/93#, oil-base. Packed off 15 minutes due to gas.
6	11260	11348	Drilled 5-7/8" hole. Mud 92/94#, oil-base. Ran Schlumberger electric lcg.
7	11348	11370	Drilled 5-7/8" hole. Mud 94/96#, oil-base. Gas shows on ditch for 25 minutes.
8	11370		Hung 5" liner at 11,365', top at 10,663'. Perforation: 11,365/11,259, 11,227/11,188', 11,156/10,698. 15 mesh 1-1/2" slots, 8 rows, 4" centers, clusters of four. Liner details: 5", 18#, N-80 S Extruded, R-2. Mud 94/96#, oil-base.
9	11370		Landed tubing at 10,539'. Tubing details: 2-1/2" UP, 6.5#, 8 Rd thrd. R-2. Mud 93#, oil-base. Displaced mud with oil.

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

MOLE SIZE	MOLE FROM	MOLE TO	CASING SIZE	DEPTH SET
17"	0	1010	11-3/4"	cemented 1010'
10-5/8"	1010	5573	7"	cemented 10699'
9-7/8"	5573	10700		
5-7/8"	10700	11042		

DRILL PIPE SIZES 3-1/2"

DRILLERS
Lyon, W. C.
Bigler, W. H.
Alberts, R.
Martin,

SIGNED

Kw Oil & Gas

SHELL OIL COMPANY

WELL NO.

DRILLING REPORT

FOR PERIOD ENDING

October 16, 1949

Ventura (FIELD)

Ventura (COUNTY)

Edison 50 (SECTION OR LEASE)

Sec. 21, T. 3N, R. 3W (TOWNSHIP OR RANCHO)

DAY	DEPTHS FROM	DEPTHS TO	REMARKS
10-10	11,370		Turned to tanks at 4:45 a.m.

	Status	Hrs. Prod.	Gross Fluid	Clean Oil	Cut %	Salinity ecg	Gas Mcf	TP psi	CP psi	Bean 1/64"	Gravity Dry
	F	6	290	285	1.8			2000	1500	16	28.8°
11	F	24	736	721	2.1			2000 2500	1500	13	
12	F	24	741	723	2.4		581	2075	1500	13	28.5°
13	F	24	729	708	2.9		542	2075	1500	13	28.2°
14	F	24	741	713	3.8			1700	1350	13	
15	F	24	715	692	3.3			1700	1350	13	
16	F	24	718	696	3.1		554	1900	1350	13	

FINAL REPORT

DIVISION OF OIL AND GAS
RECEIVED
OCT 20 1949
SANTA PAULA, CALIFORNIA

CONDITION AT BEGINNING OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
17"	0'	1010'	11-3/4"	Cemented 1010'
10-5/8"	1010'	5573'	7"	10699'
9-7/8"	5573'	10700'		
5-7/8	10700'	11370'		

DRILL PIPE SIZES

DRILLERS

Bigler, W. H.
Alberts, R.
Lyon, W. C.

F. L. Custer

SIGNED

Ventura (FIELD) — REPORT — Edison (SECTION OR LEASE)

Ventura (COUNTY) — 12-20-51 (FROM) to 12-29-51 (TO) (PERIOD) — Sec 21, T3N, R23W (TOWNSHIP OR RANCHO)

DATE	REMARKS (SHOW SIZE AND TYPE TOOLS RUN)
12-20	Moved in reconditioning unit.
12-21	Rigged up and killed well with 300 bbls. of oil base mud. All water in returns.
12-22	Pulled tubing. Ran 4-1/8" bit on 2-3/8" drill pipe and tubing.
12-23	Cleaning out with 4-1/8" bit 10606/10694'.
12-24	Cleaning out with 4-1/8" bit 10694/11031'. Started out with 4-1/8" bit.
12-25	Finished pulling bit. Ran M & T straddle tool to 9000'.
12-26	Tested 7" casing and liner hanger with 1200# for 15 min. O.K.
12-27	Pulled tubing. Ran in 2-1/2" tubing to 11031' and spotted oil in liner. Pulled up to 9995'. (Sargent pump shoe 25-0 stands up and 2-1/2 UP collar on bottom.)
12-28	Displaced oil base mud with oil.
12-29	Well dead. Waiting on pumping equipment.

DEC 3 1952

SANTA BARBARA, CALIFORNIA

CONDITION AT FIRST OF PERIOD

HOLE SIZE	HOLE FROM	HOLE TO	CASING SIZE	DEPTH SET
			11-3/4"	cemented 1010'
			7"	" 10699'
			5"	Liner 10663/11365'
			Perfs.	10698/11365'

DRILL PIPE SIZES

CONDITION BEFORE STARTING WORK
(CROSS OUT ALL BUT APPROPRIATE ITEMS)

DEPTH (ORIGINAL) 11,370' TOP PLUG (P) OR BRIDGE (B) 11052'

DEPTH LAST (RD. OR DE.) _____ TOP FISH (F) OR JUNK (J) _____

DEPTH PRESENT EFFECTIVE _____ BAD CSG. (C) OR LINER (L) _____

NOTE—IN ADDITION TO REPORTING ROUTINE RECONDITIONING OPERATIONS, USE THIS FORM FOR REPORTING THE FIRST INSTALLATION OF PUMPING EQUIPMENT (UNLESS WELL WAS ORIGINALLY COMPLETED ON THE PUMP). BAD CASING, FISH LEFT IN HOLE, ETC., THAT MAY OCCUR AS A RESULT OF PRODUCING OR SHUT DOWN OPERATIONS.

W. W. Douglas
SIGNED

FORM 109-A (10-48)

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Report on Test of Water Shut-off
(FORMATION TESTER)

No. T 2-5570

Santa Paula Calif. September 29 19 49

Mr. J. L. Arthur
Ventura Calif.
Agent for Shell Oil Company, Inc.

DEAR SIR:

Your well No. "Wilson" 50, Sec. 21, T. 3N., R. 23 W., S.B. B & M.
Ventura Field, in Ventura County, was tested for water shut-off
on September 28, 19 49. Mr. E. J. Kaplow, designated by the supervisor,
was present as prescribed in Secs. 3222 and 3223, Ch. 93, Stat. 1939; there were also present
B. Nevill, engineer, and E. C. Lyon, driller

Shut-off data: 7 in. 26-35 lb. casing was cemented around the shoe at 10699 ft.
on September 24, 19 49 in 10 5/8 in. hole with 1900 sacks of cement
of which 7 sacks was left in casing.

Casing record of well: 11 3/4" cem. 1010'; 7" as above, R.S.O.

Present depth 10704 ft. Bridged with cement from - ft. to - ft. Cleaned out to 10704 ft. for test.
A pressure of 1500 lb. was applied to the inside of casing for 10 min. without loss after cleaning out to 10654 ft.
A Johnston tester was run into the hole on 3½ in. drill pipe-~~tubing~~,
with 1686 ft. of water-~~mud~~ cushion, and packer set at 10631 ft. with tailpiece to 10647 ft.
Tester valve, with 3/8 in. bean, was opened at 7:25 a.m. and remained
open for 1 hr. and no min. During this interval there was a medium to strong blow for the
duration of the test. Gas reached the surface in 40 minutes.

The Deputy arrived at 12:45 p.m. and Mr. Nevill reported:

1. The top of the fluid was found at 825' above the trip valve indicating a rise of that amount.
2. The fluid was cushion water with some oil.

The Deputy noted:

1. The bottom 5 1/3 stands contained thick, oily, gassy mud with no evidence of free water.
2. Both pressure bomb charts satisfactorily checked the details of the test as given above.

The 7" water shut-off at 10699' IS APPROVED.

11

CC: Exploitation Engineering Dept.

R. D. BUSH, State Oil and Gas Supervisor

By E. J. Kaplow, Deputy

98241 10-48 25M SPO

FORM 105.
CALIFORNIA STATE PRINTING OFFICE

DIVISION OF OIL AND GAS
RECEIVED
JUL 11 1949
SANTA PAULA, CALIFORNIA

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Notice of Intention to Drill New Well

This notice must be given and surety bond filed before drilling begins

Ventura Calif. July 8 1949

DIVISION OF OIL AND GAS

Santa Paula Calif.

In compliance with Section 3203, Chapter 93, Statutes of 1939, notice is hereby given that it is our intention to commence the work of drilling well No. Edison 50, Sec. 21, T. 3N, R. 23W, S.B. B. & M., Ventura Field, Ventura County.

Legal description of lease

The well is 1388.70 feet N. ~~or S.~~, and 1812.25 feet ~~E.~~ or W. from R.C.L. Corner No. 11
(Give location in distance from section corners or other corners of legal subdivision)

Elevation of ground above sea level 150± feet.

All depth measurements taken from top of , which is 10± feet above ground.

We estimate that the first productive oil or gas sand should be encountered at a depth of about 10,000 feet.

We propose to use the following strings of casing, either cementing or landing them as herein indicated:

Size of Casing, Inches	Weight, Lb. Per Foot	Grade and Type	Depth	Landed or Cemented
11-3/4"	40±	H-40	1,000'±	Cemented
7	26/32	N-80	10,650'±	Cemented
5	18	J-55	11,300'±	Landed

Do not enter. Treat as correction to location and casing setting point which require

MAP | MAP BOOK | CARDS | BOND | FORMS 114 121

Well is to be drilled with ~~cable~~ rotary tools.

no answer. - E.J.R.

It is understood that if changes in this plan become necessary we are to notify you before cementing or landing casing.

Address P. O. Box 691

Shell Oil Company, Incorporate
(Name of Operator)

Telephone number MI3-2204

By J. L. Arthur

ADDRESS NOTICE TO DIVISION OF OIL AND GAS IN DISTRICT WHERE WELL IS LOCATED

FORM 111. [illegible]
CALIFORNIA STATE PRINTING OFFICE

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

DIVISION OF OIL AND GAS

Report on Proposed Operations

No. P 2-6498

Santa Paula Calif. February 15 19 49

MR. J. L. Arthur

Ventura Calif.

Agent for Shell Oil Company, Inc.

DEAR SIR:

Your proposal to drill Well No. "Edison" 50,

Section 21, T. 3N., R. 23 W., S.B. B. & M., Ventura Field, Ventura County,

dated Feb. 11 1949, received Feb. 12 19 49, has been examined in conjunction with records filed in this office.

Present conditions as shown by the records and the proposal are as follows:

THE NOTICE STATES:

"Lease consists of 122 acres.
The well is 1360.54' N., and 1805.13' W. from RCL Corner No. 11
The elevation of the derrick floor above sea level is 160±'.
We estimate that the first productive oil or gas sand should be encountered at a depth of about 9200 feet."

PROPOSAL:

"We propose to use the following strings of casing, either cementing or landing them as herein indicated:

Size of Csg., inches	Weight, Lb. Per Ft.	Grade & Type	Depth	Landed or Cemented	
11-3/4"	40±	H-40	1000'±	Cemented	
7"	26, 28 & 32	J-55 & N-80	9950'±	Cemented	See corrected notice for revised program
5"	18	J-55	11300'±	Cemented	

Well is to be drilled with rotary tools.
It is understood that if changes in this plan become necessary we are to notify you before cementing or landing casing."

DECISION: YOUR PROPOSAL IS APPROVED PROVIDED THAT:

1. Sufficient cement shall be pumped back of the 11 3/4" casing to reach to the surface.
2. The well is, at all times, kept full of drilling fluid of proper weight and quality and adequate equipment is provided and kept ready at the well to prevent blowouts.
3. Any sidetracked hole penetrating an oil or gas zone shall be plugged with cement insofar as possible.
4. At least 1000 sacks of cement shall be used in cementing the 7" casing.
5. No cement shall be pumped into the annular space between the 11 3/4" and 7" casings and mud fluid shall be maintained at the surface between these casings.
6. This Division shall be notified to witness a test of the 7" water shut-off.

Blanket bond

CC: Exploitation Engineering Dept.

R. D. BUSH
State Oil and Gas Supervisor

By E. J. Kaplow Deputy

FORM 105.
CALIFORNIA STATE PRINTING OFFICE

STATE OF CALIFORNIA
DEPARTMENT OF NATURAL RESOURCES

11-04373

DIVISION OF OIL AND GAS

10

Notice of Intention to Drill New Well

This notice must be given and surety bond filed before drilling begins

Ventura Calif. February 11 19 49

DIVISION OF OIL AND GAS

Santa Paula Calif.

In compliance with Section 3203, Chapter 93, Statutes of 1939, notice is hereby given that it is our intention to commence the work of drilling well No. Edison 50, Sec. 21, T. 3 N., R. 23 W., S. B. B. & M., Ventura Field, Ventura County.

Lease consists of 122 acres

The well is 1360.54 feet N. ~~of S.~~, and 1805.13 feet ~~E. of W.~~ W. from RCL Corner No. 11
(Give location in distance from section corners or other corners of legal subdivision)

The elevation of the derrick floor ~~ground~~ above sea level is 160+ feet.

We estimate that the first productive oil or gas sand should be encountered at a depth of about 9200 feet.

We propose to use the following strings of casing, either cementing or landing them as herein indicated:

Size of Casing, Inches	Weight, Lb. Per Foot	Grade and Type	Depth	Landed or Cemented
11-3/4"	40+	H-40	1000'+	Cemented
7"	26, 28 & 32	J-55 & N-80	9950'+	Cemented
5"	18	J-55	11300'+	Cemented

DIVISION OF OIL AND GAS
RECEIVED
FEB 12 1949
SANTA PAULA, CALIFORNIA

Well is to be drilled with rotary ~~cable~~ tools.

It is understood that if changes in this plan become necessary we are to notify you before cementing or landing casing.

Address P. O. Box 691

Telephone number 2204

Shell Oil Company, Incorporated
(Name of Operator)

By J. L. Arthur

ADDRESS NOTICE TO DIVISION OF OIL AND GAS IN DISTRICT WHERE WELL IS LOCATED

MAP	MAP BOOK	CARDS	BOND	FORMS 114
16				
2/14/49 JCD	2/14/49 JCD			